




105oC 3,000 hrs( 6.3) 5,000 hrs ( 8&10)

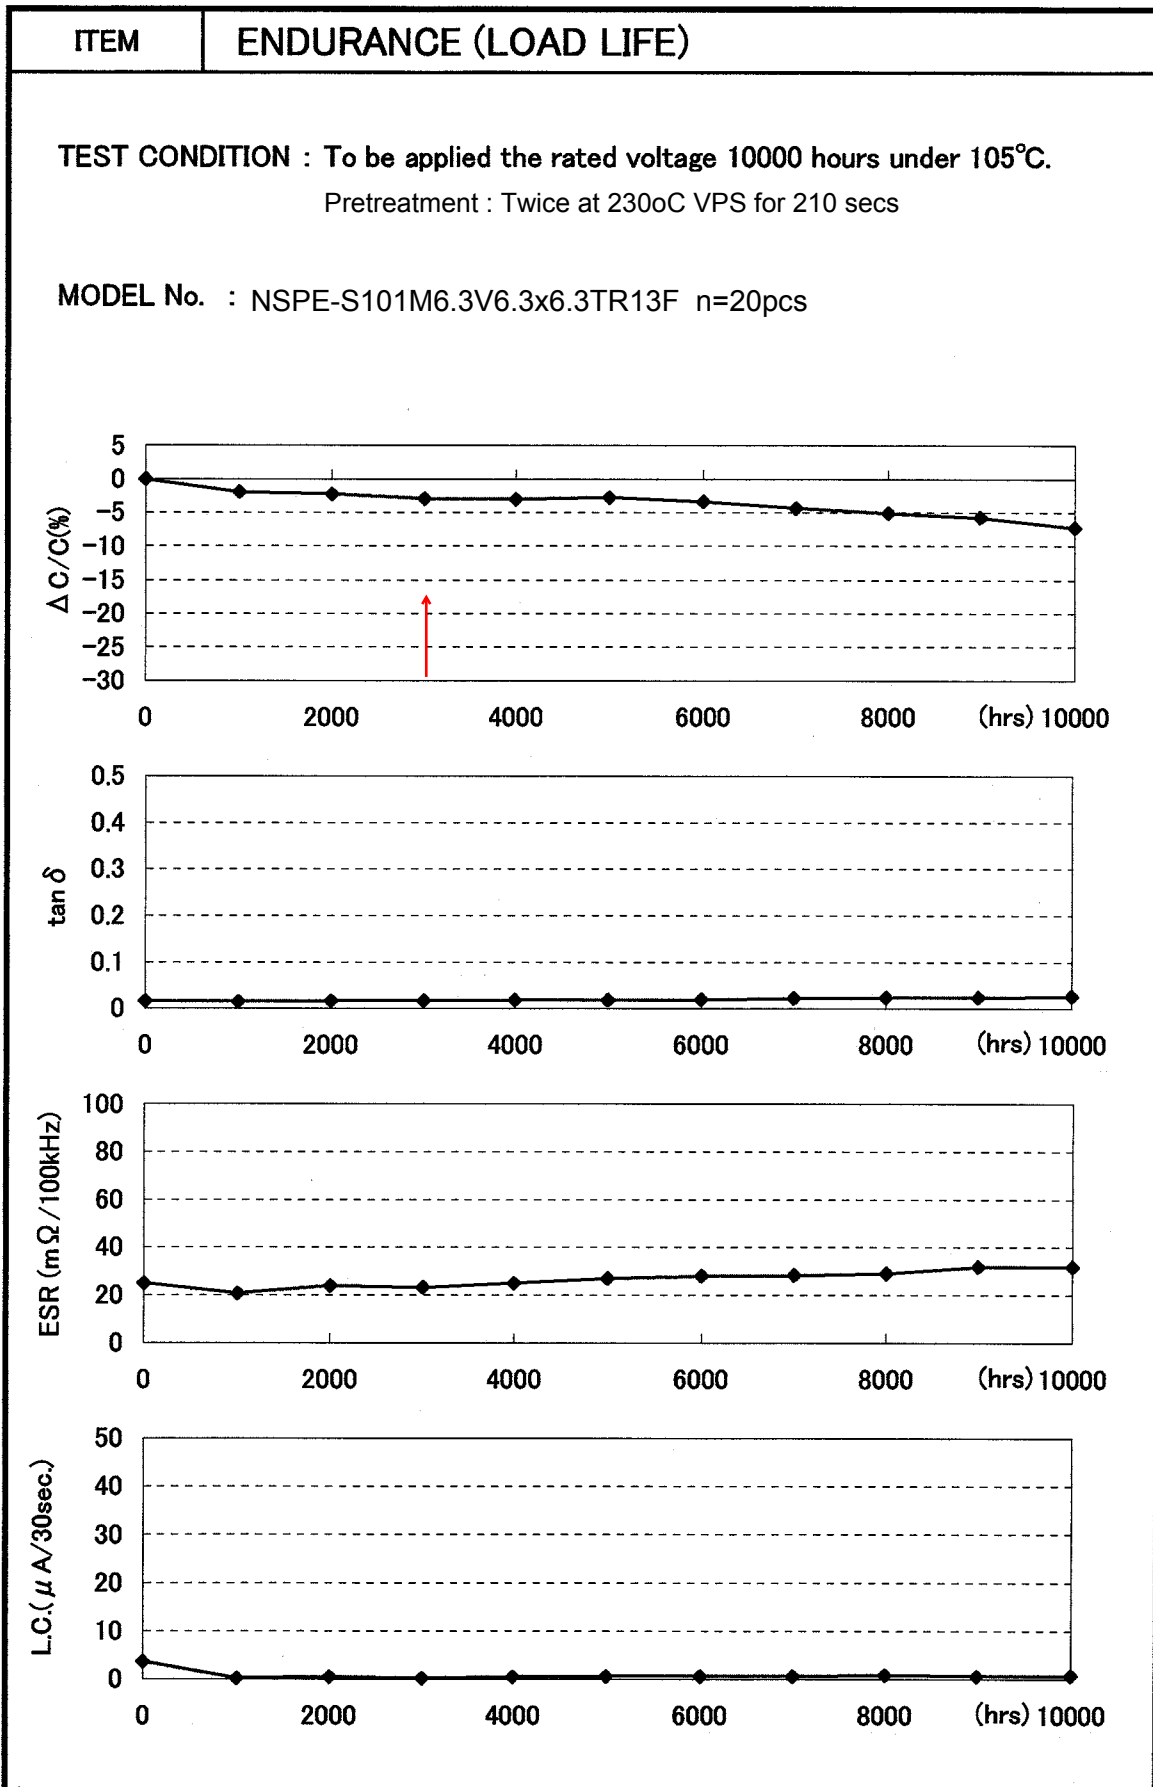

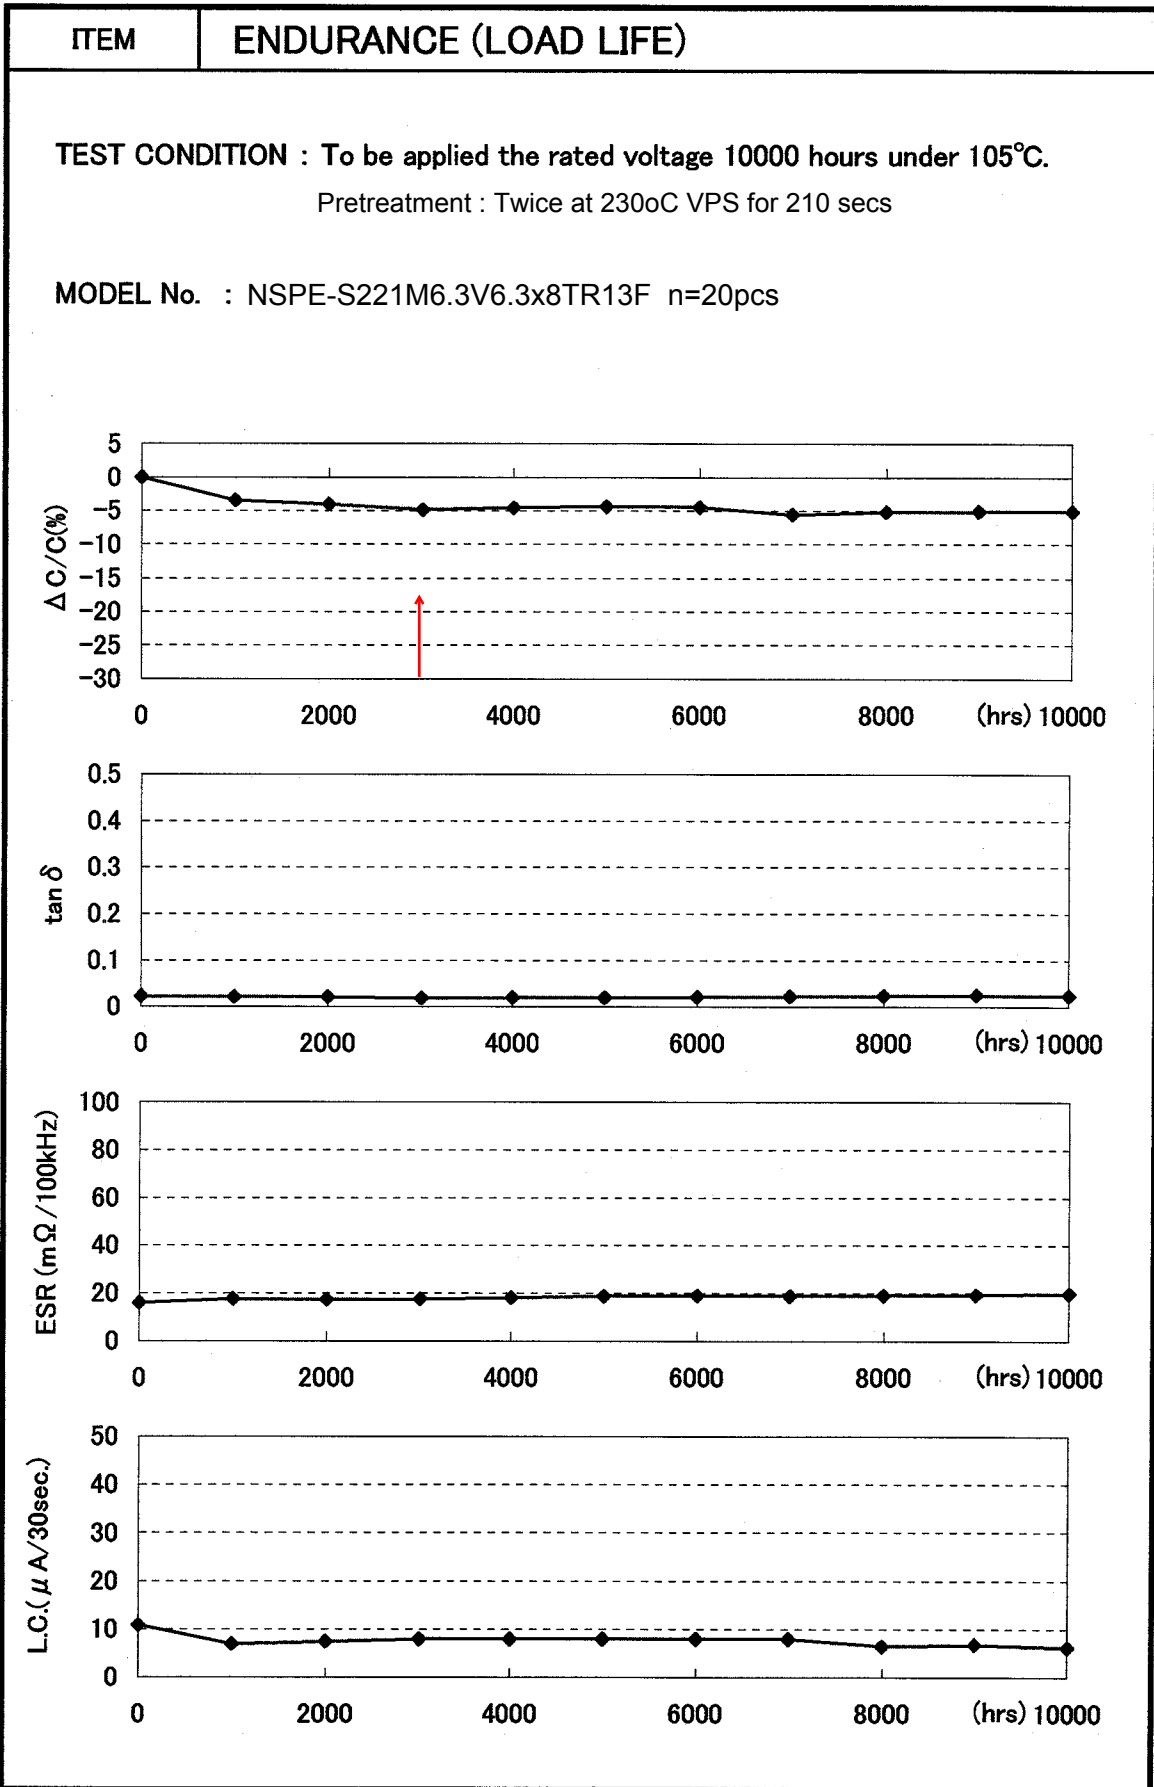

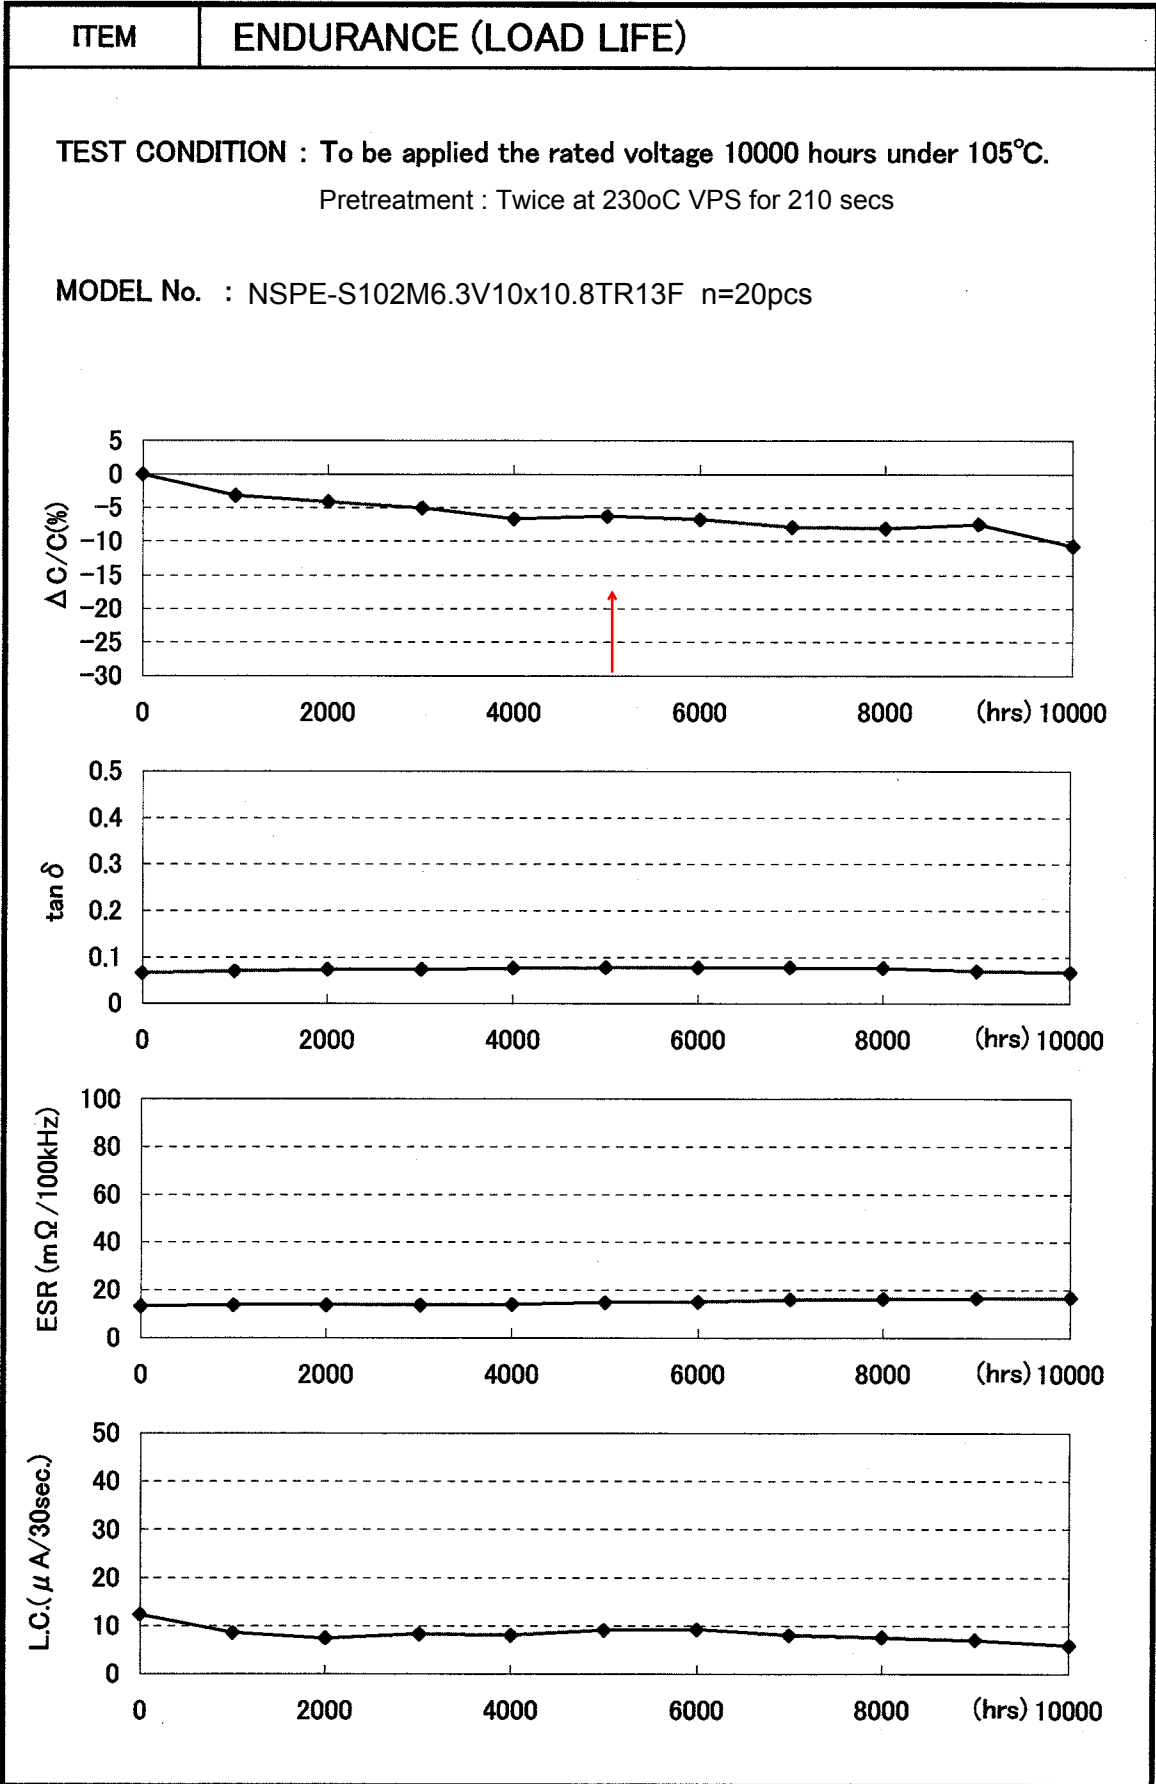


ITEM	ENDURANCE (LOAD LIFE)
------	-----------------------

TEST CONDITION : To be applied the rated voltage 10000 hours under 105°C.

Pretreatment : Twice at 230oC VPS for 210 secs

MODEL No. : NSPE-S680M10V6.3x6.3TR13F n=20pcs

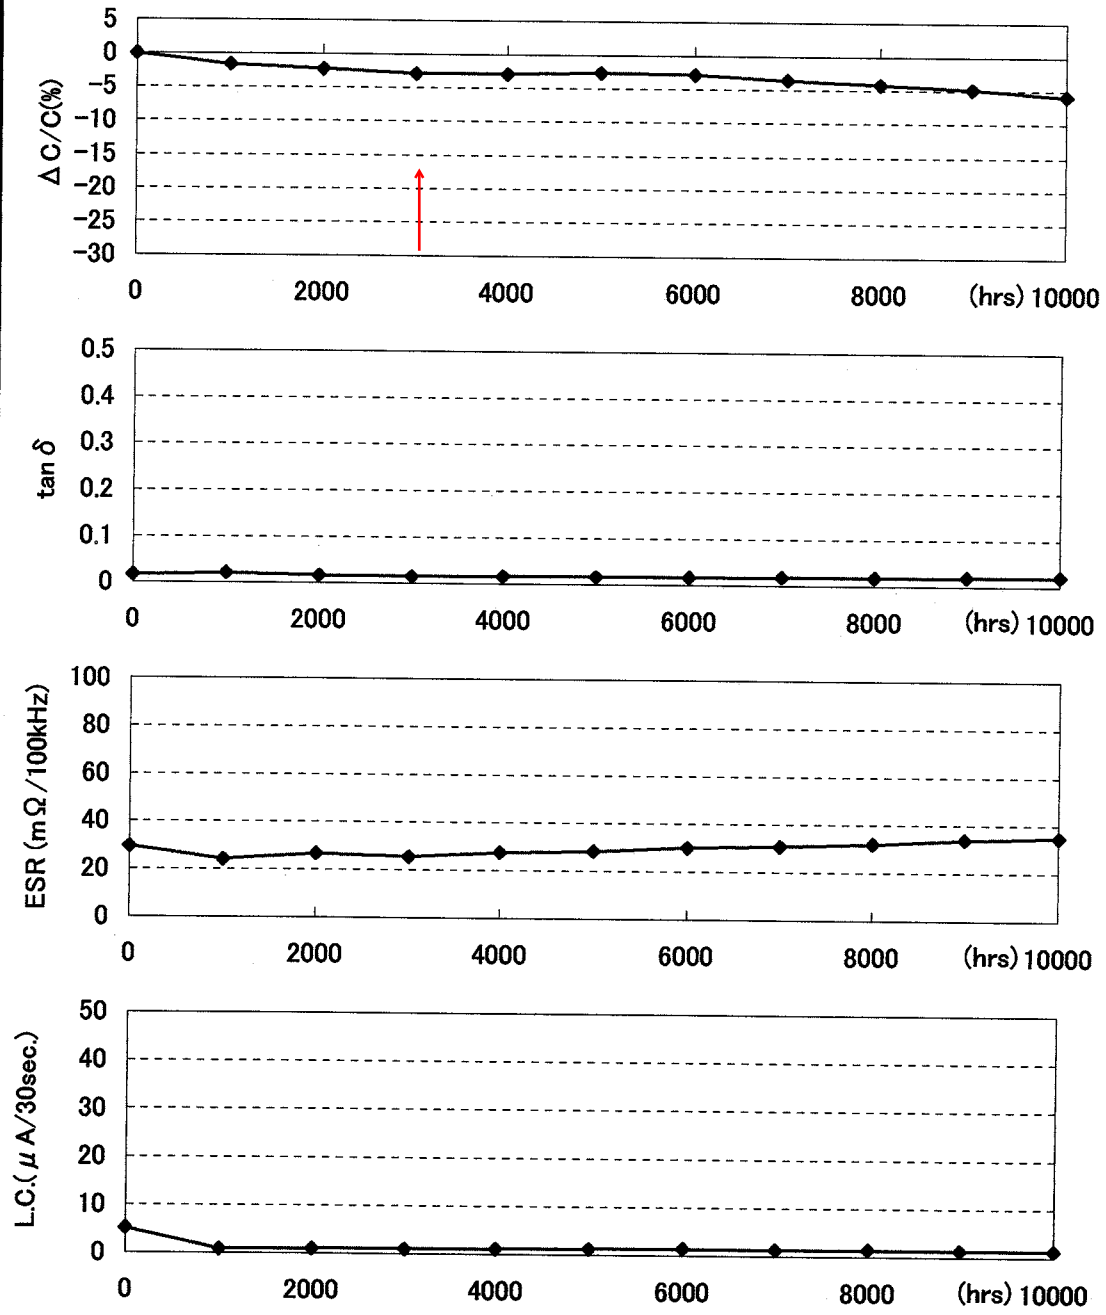


ITEM	ENDURANCE (LOAD LIFE)
------	-----------------------

TEST CONDITION : To be applied the rated voltage 10000 hours under 105°C.

Pretreatment : Twice at 230oC VPS for 210 secs

MODEL No. : NSPE-S101M10V6.3x8TR13F n=20pcs




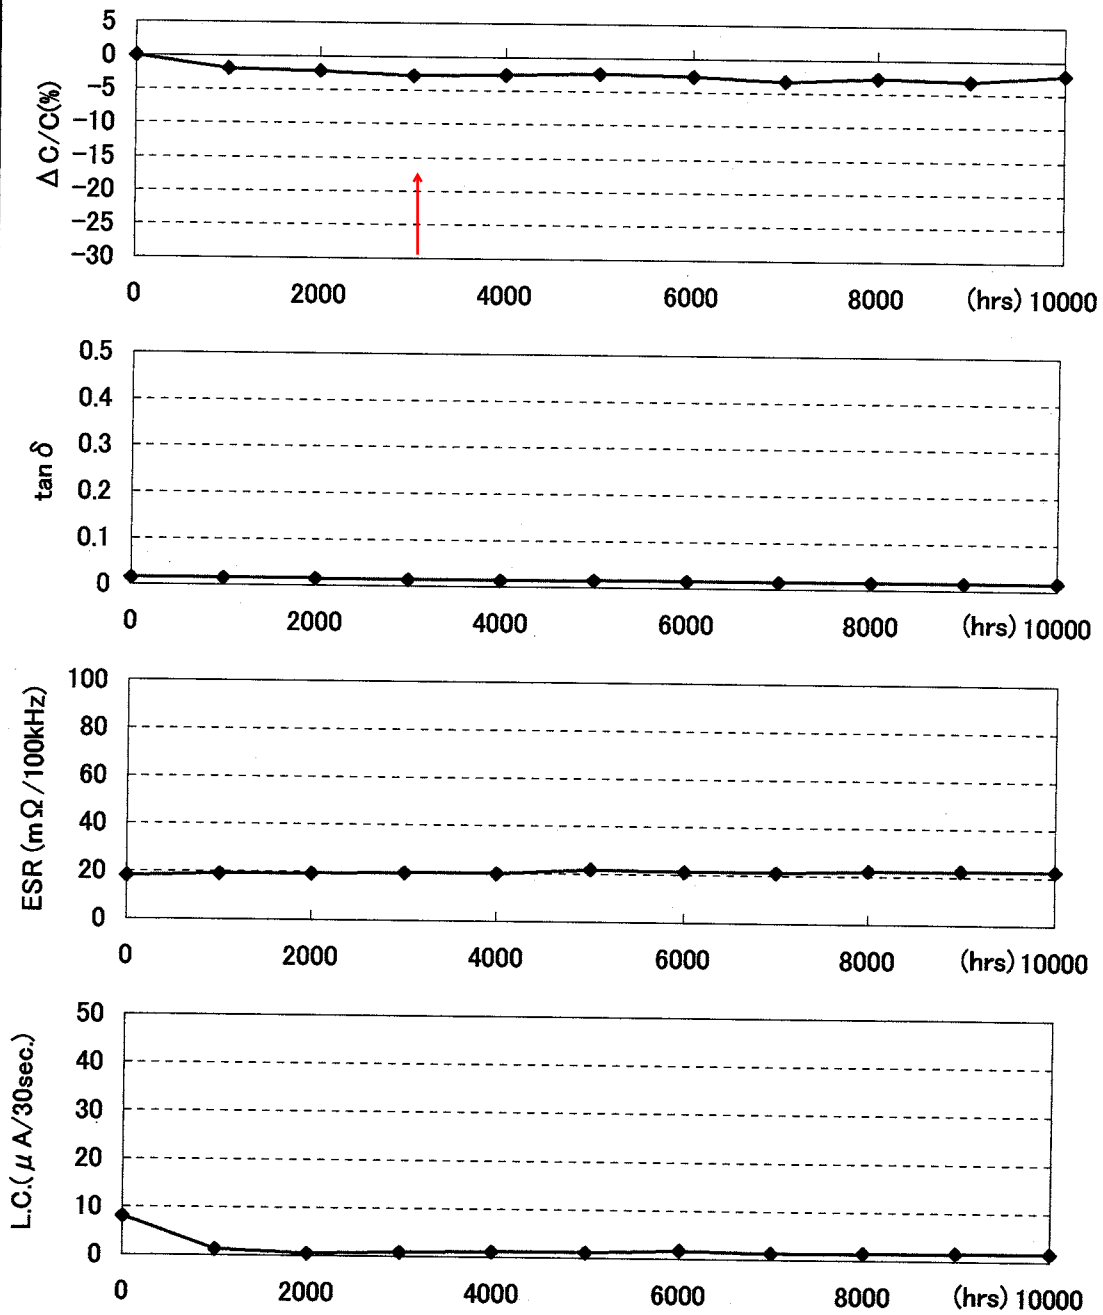


ITEM	ENDURANCE (LOAD LIFE)
------	-----------------------

TEST CONDITION : To be applied the rated voltage 10000 hours under 105°C.

Pretreatment : Twice at 230oC VPS for 210 secs

MODEL No. : NSPE-S331M10V8x10.8TR13F n=20pcs

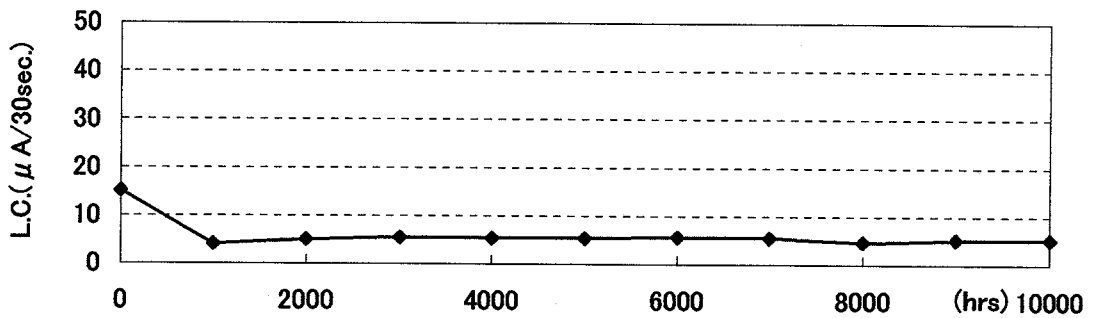
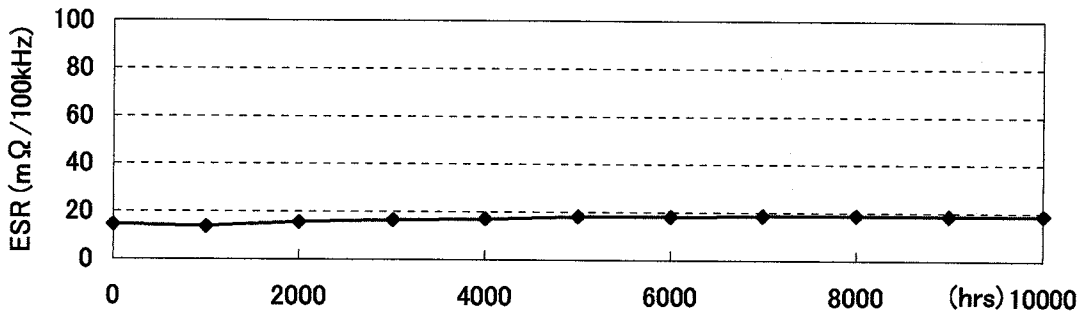
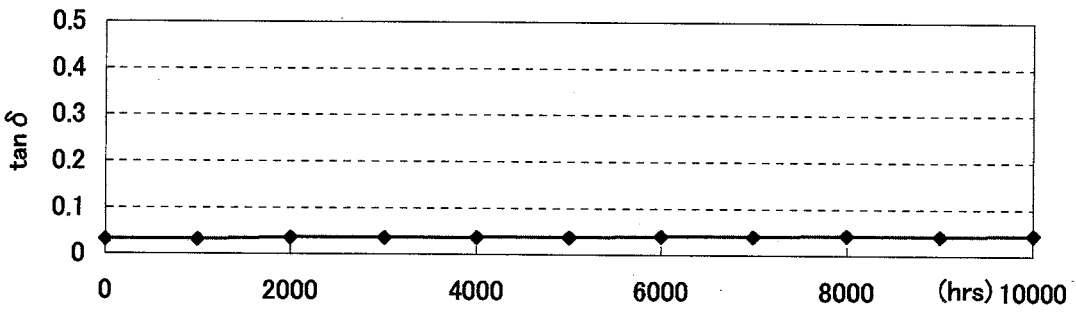
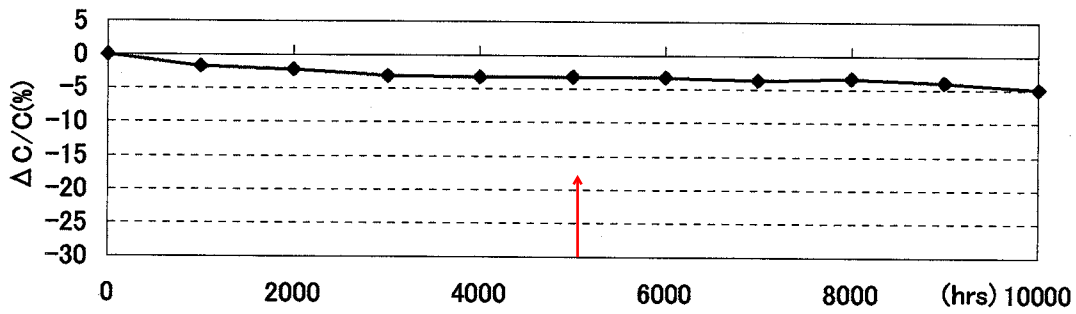



ITEM	ENDURANCE (LOAD LIFE)
------	-----------------------

TEST CONDITION : To be applied the rated voltage 10000 hours under 105°C.

Pretreatment : Twice at 230oC VPS for 210 secs

MODEL No. : NSPE-S471M10V10x10.8TR13F n=20pcs

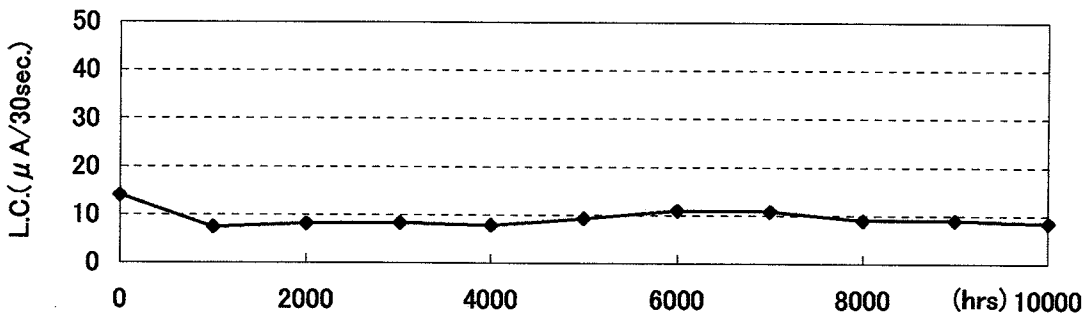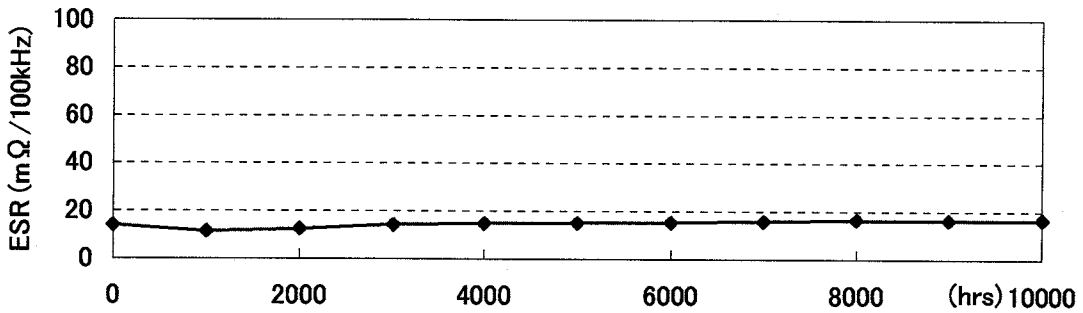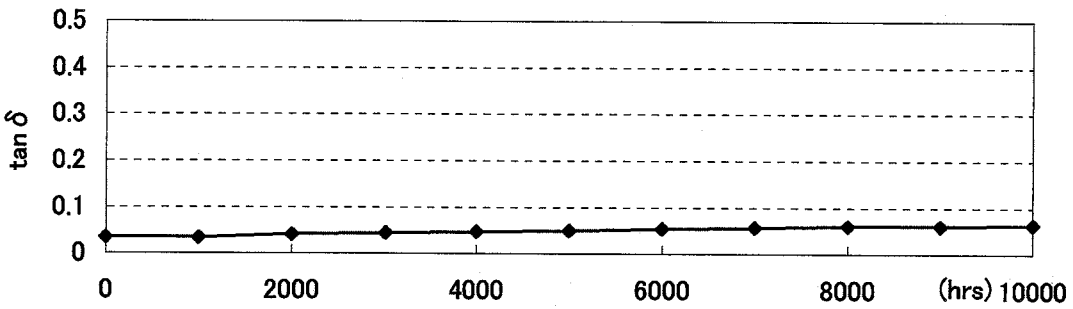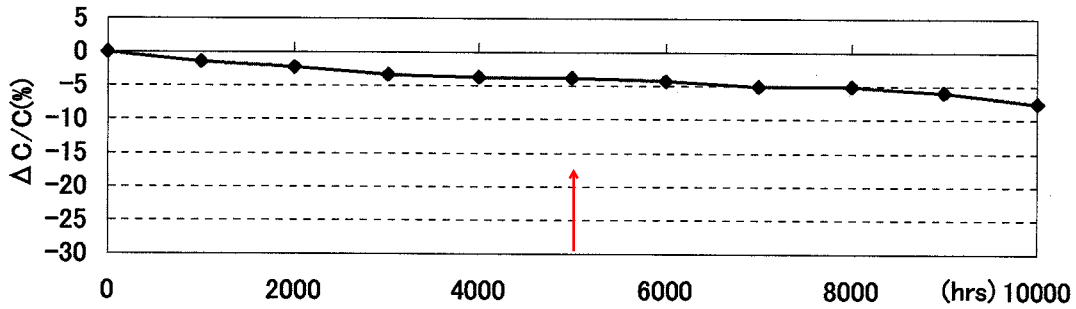




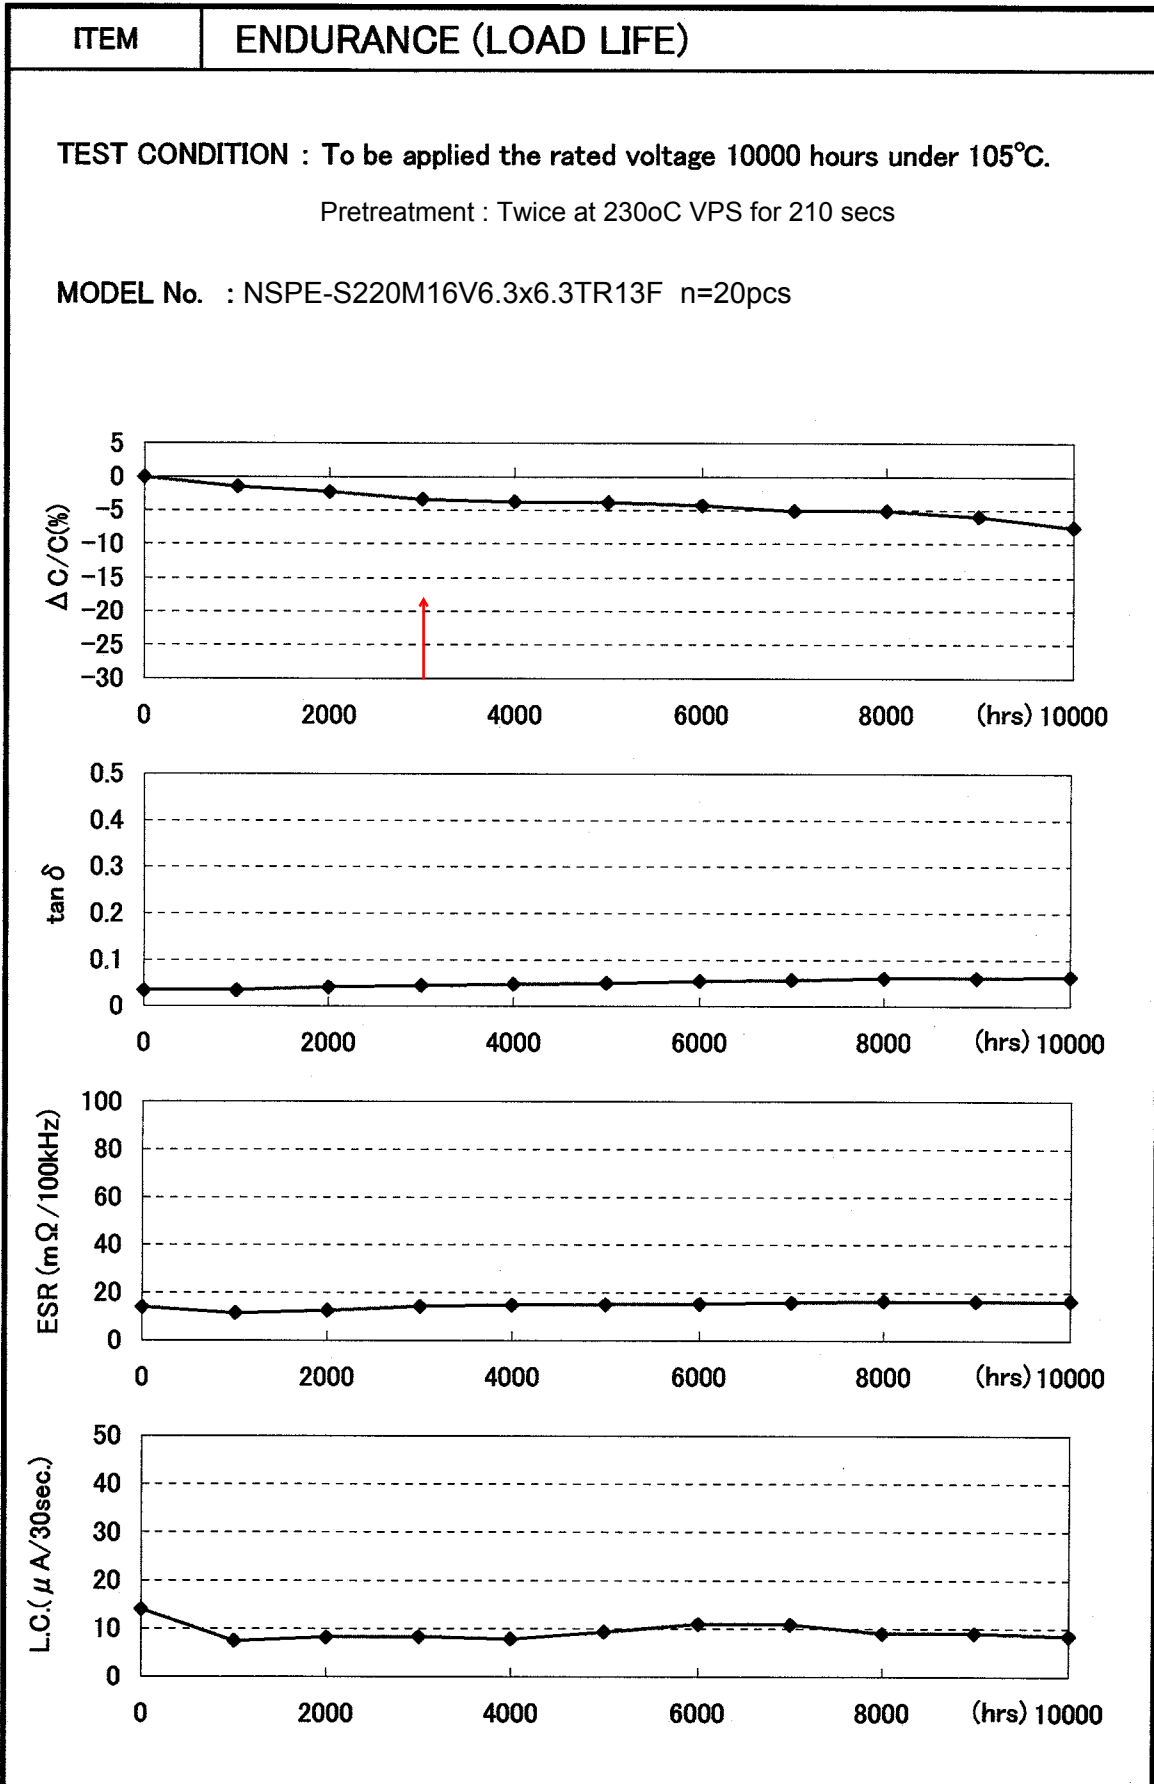


ITEM	ENDURANCE (LOAD LIFE)
------	-----------------------

TEST CONDITION : To be applied the rated voltage 10000 hours under 105°C.

Pretreatment : Twice at 230oC VPS for 210 secs

MODEL No. : NSPE-S470M16V6.3x8TR13F n=20pcs

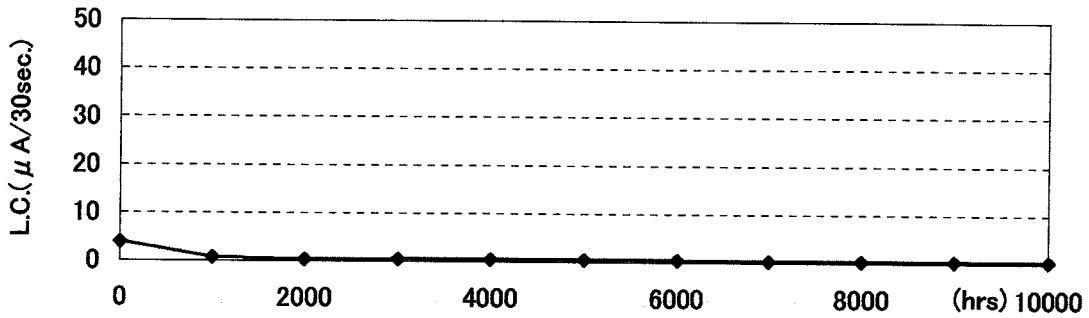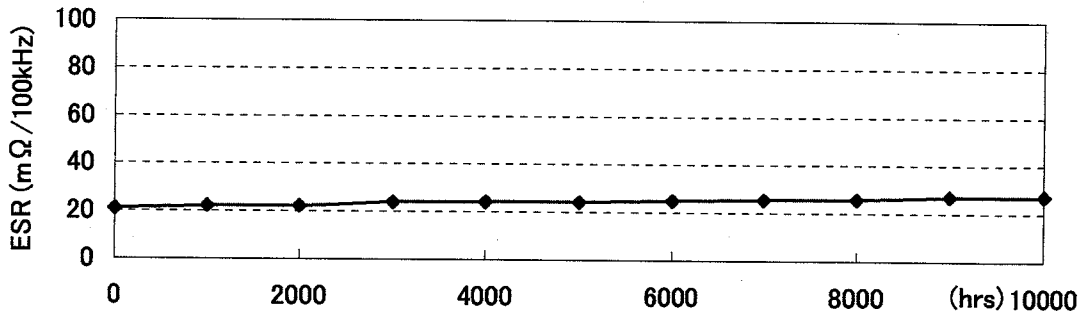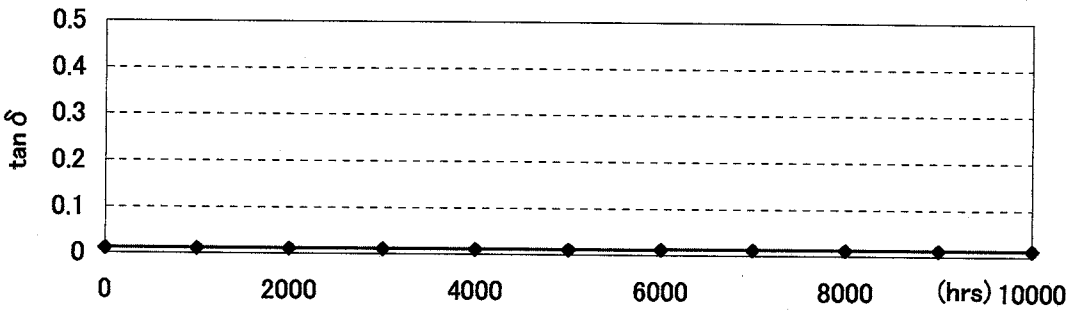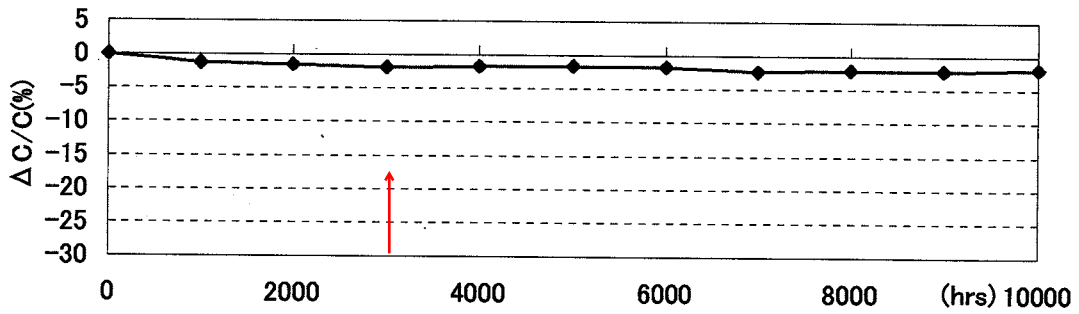

ITEM	ENDURANCE (LOAD LIFE)
------	-----------------------

TEST CONDITION : To be applied the rated voltage 10000 hours under 105°C.

Pretreatment : Twice at 230°C VPS for 210 secs

MODEL No. : NSPE-S101M16V8x10.8TR13F n=20pcs

