



www.niccomp.com/pcn | Technical Support: tpmg@niccomp.com

Issued: February 2nd, 2021

SUB: End of Life Notification

Product Type: SMT Aluminum Electrolytic Capacitors, Low Profile; V-Chip
 NIC Series: NAWS series

Effective: February 2nd, 2021
 Last order date: August 2nd, 2021
 Last ship date: February 2nd, 2022

Reason for Change: Low demand from the market
 Prepared by: Technical Product Marketing Group / tpmg@niccomp.com

→ Follow NIC PCN alerts to get email notifications of EOL and PCN announcements at www.niccomp.com/pcn

EOL PN	CAP	VOLT RATING	SIZE (DØXL)	RECOMMENDED ALTERNATIVE	NOTES*
NAWS220M6.3V5X4JBF	22 uF	6.3 VDC	5X4	NAWR220M6.3V4X4.6KLBF	4mm Ø I/S 5mm
NAWS330M6.3V5X4JBF	33 uF	6.3 VDC	5X4	NAWR330M6.3V5X4.6KBF	
NAWS470M6.3V5X4JBF	47 uF	6.3 VDC	5X4	NAWR470M6.3V5X4.6KBF	
NAWS470M6.3V6.3X4JBF	47 uF	6.3 VDC	6.3X4	NAWR470M6.3V5X4.6KBF	5mm Ø I/S 6.3mm
NAWS680M6.3V6.3X4JBF	68 uF	6.3 VDC	6.3X4	NAWR101M6.3V6.3X4.6KBF	100uF I/S 68uF
NAWS101M6.3V6.3X4JBF	100 uF	6.3 VDC	6.3X4	NAWR101M6.3V6.3X4.6KBF	
NAWS220M10V5X4JBF	22 uF	10 VDC	5X4	NAWR220M10V5X4.6KBF	
NAWS330M10V5X4JBF	33 uF	10 VDC	5X4	NAWR330M10V5X4.6KBF	
NAWS330M10V6.3X4JBF	33 uF	10 VDC	6.3X4	NAWR330M10V5X4.6KBF	5mm Ø I/S 6.3mm
NAWS470M10V6.3X4JBF	47 uF	10 VDC	6.3X4	NAWR470M10V6.3X4.6KBF	
NAWS100M16V5X4JBF	10 uF	16 VDC	5X4	NAWR100M16V4X4.6KLBF	4mm Ø I/S 5mm



NIC Components Corp.

www.niccomp.com/pcn | Technical Support: tmg@niccomp.com

EOL PN	CAP	VOLT RATING	SIZE (DØXL)	RECOMMENDED ALTERNATIVE	NOTES*
NAWS220M16V5X4JBF	22 uF	16 VDC	5X4	NAWR220M16V5X4.6KBF	
NAWS220M16V6.3X4JBF	22 uF	16 VDC	6.3X4	NAWR220M16V5X4.6KBF	5mm Ø I/S 6.3mm
NAWS330M16V6.3X4JBF	33 uF	16 VDC	6.3X4	NAWR330M16V6.3X4.6KBF	
NAWS470M16V6.3X4JBF	47 uF	16 VDC	6.3X4	NAWR470M16V6.3X4.6KBF	
NAWS4R7M25V5X4JBF	4.7 uF	25 VDC	5X4	NAWR100M25V5X4.6KBF	10uF I/S 4.7uF
NAWS100M25V5X4JBF	10 uF	25 VDC	5X4	NAWR100M25V5X4.6KBF	
NAWS220M25V6.3X4JBF	22 uF	25 VDC	6.3X4	NAWR220M25V6.3X4.6KBF	
NAWS330M25V6.3X4JBF	33 uF	25 VDC	6.3X4	NAWR330M25V6.3X4.6KBF	
NAWS4R7M35V5X4JBF	4.7 uF	35 VDC	5X4	NAWR4R7M35V4X4.6KLBF	4mm Ø I/S 5mm
NAWS100M35V5X4JBF	10 uF	35 VDC	5X4	NAWR100M35V5X4.6KBF	
NAWS220M35V6.3X4JBF	22 uF	35 VDC	6.3X4	NAWR220M35V6.3X4.6KBF	
NAWS1R0M50V5X4JBF	1 uF	50 VDC	5X4	NAWR1R0M50V4X4.6KLBF	4mm Ø I/S 5mm
NAWS2R2M50V5X4JBF	2.2 uF	50 VDC	5X4	NAWR2R2M50V4X4.6KLBF	4mm Ø I/S 5mm
NAWS3R3M50V5X4JBF	3.3 uF	50 VDC	5X4	NAWR3R3M50V4X4.6KLBF	4mm Ø I/S 5mm
NAWS4R7M50V5X4JBF	4.7 uF	50 VDC	5X4	NAWR4R7M50V5X4.6KBF	
NAWS100M50V6.3X4JBF	10 uF	50 VDC	6.3X4	NAWR100M50V6.3X4.6KBF	

* - "J" = +240°C reflow rated ... "K" = +245°C reflow rated (upgrade)



NAWR series: www.niccomp.com/products/catalog/nawr.pdf

Surface Mount Aluminum Electrolytic Capacitors NAWS Series

FEATURES

- CYLINDRICAL V-CHIP CONSTRUCTION FOR SURFACE MOUNTING
- LOW PROFILE 4MM HEIGHT
- LOAD LIFE (1,000 HOURS @ +105°C)
- DESIGNED FOR AUTOMATIC MOUNTING AND REFLOW SOLDERING

SAC Alloy Compatible
240°C

RoHS Compliant
includes all homogeneous materials



CHARACTERISTICS

Rated Voltage Rating	6.3 ~ 50Vdc						
Rated Capacitance Range	1.0 ~ 100μF						
Operating Temp. Range	-40 ~ +105°C						
Capacitance Tolerance	±20% (M)						
Max. Leakage Current After 2 Minutes @ 20°C	0.01CV or 3μA whichever is greater						
Dissipation Factor	W.V. (Vdc)	6.3	10	16	25	35	50
	S.V. (Vdc)	8.0	13	20	32	44	63
	Tan δ @ 120Hz/20°C	0.38	0.32	0.20	0.16	0.14	0.14
Low Temperature Stability Impedance Ratio @ 120Hz	W.V. (Vdc)	6.3	10	16	25	35	50
	Z-25°C/Z+20°C	4	3	2	2	2	2
	Z-40°C/Z+20°C	10	8	6	4	4	4
Load Life Test @ 105°C 1,000 hours	Capacitance Change	Within ±30% of initial measured value					
	Tan δ	Less than ±300% of the specified maximum value					
	Leakage Current	Less than the specified maximum value					

*See Part Number System for Details

STANDARD VALUES AND CASE SIZES (mm)

Cap. (μF)	Code	Working Voltage (Vdc)					
		6.3	10	16	25	35	50
1.0	1R0	-	-	-	-	-	5X4
2.2	2R2	-	-	-	-	-	5X4
3.3	3R3	-	-	-	-	-	5X4
4.7	4R7	-	-	-	5X4	5X4	5X4
10	100	-	-	5X4	5X4	5X4	6.3X4
22	220	5X4	5X4	5X4	6.3X4	6.3X4	-
				6.3X4			
33	330	5X4	5X4	6.3X4	6.3X4	-	-
			6.3X4				
47	470	5X4	6.3X4	6.3X4	-	-	-
		6.3X4					
68	680	6.3X4	-	-	-	-	-
100	101	6.3X4	-	-	-	-	-


PEAK REFLOW TEMPERATURE CODES

Code	Peak Reflow Temperature
J	240°C

TERMINATION FINISH & PACKAGING OPTIONS CODES


Code	Finish & Reel Size
B	Sn-Bi Finish & 13" Reel

PART NUMBER SYSTEM

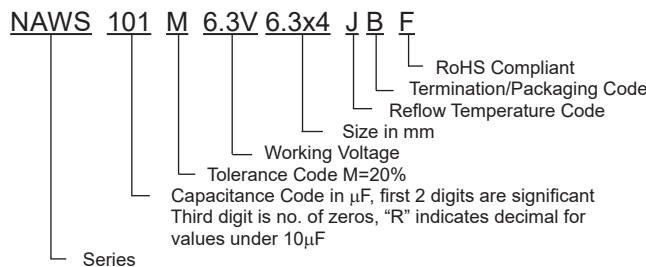

DIMENSIONS (mm) AND REEL QUANTITIES

Case Size	φD±0.5	L max.	A±0.2	B±0.2	I±0.3	W	P±0.2	Qty/Reel
5x4	5.0	4.0	5.3	5.3	2.3	0.5 ~ 0.8	1.4	1,000
6.3x4	6.3	4.0	6.6	6.6	2.6	0.5 ~ 0.8	2.2	1,000

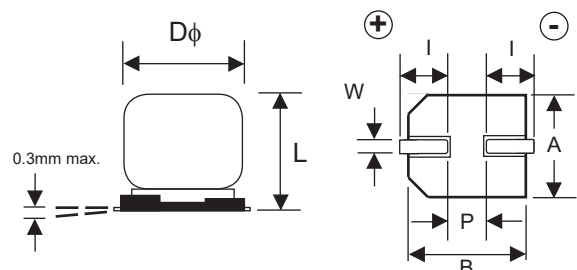

Surface Mount Aluminum Electrolytic Capacitors NAWS Series

STANDARD VALUES, CASE SIZES AND SPECIFICATIONS

NIC Part Number	Cap. (μF)	W.V. (Vdc)	Dissipation Factor (Tan δ)	Max. ESR (Ω) 120Hz, +20°C	Max. Ripple Current (mA) +105°C, 120Hz	Load Life Hours @ +105°C	
NAWS220M6.3V5X4JBF	22	6.3	0.38	28.65	23	1000	
NAWS330M6.3V5X4JBF	33		0.38	19.10	28	1000	
NAWS470M6.3V5X4JBF	47		0.38	13.41	34	1000	
NAWS470M6.3V6.3X4JBF			0.38	13.41	42	1000	
NAWS680M6.3V6.3X4JBF	68		0.38	9.27	49	1000	
NAWS101M6.3V6.3X4JBF	100		0.38	6.30	52	1000	
NAWS220M10V5X4JBF	22	10	0.32	24.13	25	1000	
NAWS330M10V5X4JBF			33	0.32	16.08	30	1000
NAWS330M10V6.3X4JBF				0.32	16.08	35	1000
NAWS470M10V6.3X4JBF			47	0.32	11.29	38	1000
NAWS100M16V5X4JBF	10	16	0.20	33.17	18	1000	
NAWS220M16V5X4JBF	22		0.20	15.08	26	1000	
NAWS220M16V6.3X4JBF			0.20	15.08	31	1000	
NAWS330M16V6.3X4JBF	33		0.20	10.05	35	1000	
NAWS470M16V6.3X4JBF	47		0.20	7.06	38	1000	
NAWS4R7M25V5X4JBF	4.7		25	0.16	56.47	13	1000
NAWS100M25V5X4JBF	10	0.16		26.54	21	1000	
NAWS220M25V6.3X4JBF	22	0.16		12.06	35	1000	
NAWS330M25V6.3X4JBF	33	0.16		8.04	42	1000	
NAWS4R7M35V5X4JBF	4.7	35	0.14	49.41	13	1000	
NAWS100M35V5X4JBF	10		0.14	23.22	22	1000	
NAWS220M35V6.3X4JBF	22		0.14	10.56	34	1000	
NAWS1R0M50V5X4JBF	1.0		50	0.14	232.22	6	1000
NAWS2R2M50V5X4JBF	2.2	0.14		105.55	10	1000	
NAWS3R3M50V5X4JBF	3.3	0.14		70.37	12	1000	
NAWS4R7M50V5X4JBF	4.7	0.14		49.41	16	1000	
NAWS100M50V6.3X4JBF	10	0.14		23.22	23	1000	

RIPPLE CURRENT FREQUENCY CORRECTION FACTOR



Frequency	120Hz	1KHz	10KHz	100KHz ~
1.0 ~ 3.3μF	1.0	1.30	1.50	1.80
>4.7 ~ 33μF	1.0	1.20	1.30	1.45
>33μF	1.0	1.10	1.20	1.30

PEAK REFLOW TEMPERATURE, DURATION AND NUMBER OF REFLOW PASSES ALLOWED

Diameter	Peak Temperature	Duration	Time above 200°C	Time above 217°C	Time above 230°C	Number of Reflow Passes
5 ~ 6.3mm φ	+240°C	Time ≥ 240°C 5 sec.	50 sec.	40 sec.	20 sec.	2

RECOMMENDED LAND PATTERN DIMENSIONS (mm)

Case Size	a	b	c
5x4	1.4	3.0	1.8
6x3x4	1.8	3.6	1.8

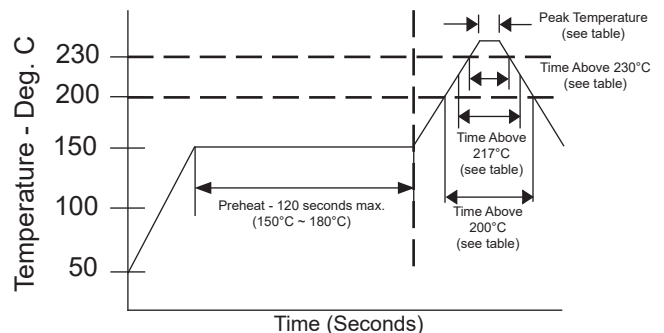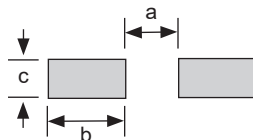

PRECAUTIONS

Please review the notes on correct use, safety and precautions found at <https://www.niccomp.com/resource/files/aluminum/AlumApplInfoCautions.pdf>
If in doubt or uncertainty, please review your specific application - process details with NIC's technical support personnel: tpmg@niccomp.com



Surface Mount Aluminum Electrolytic Capacitors NAWS Series


CARRIER TAPE

Case Size	A ±0.2	B ±0.2	C ±0.3	D ±0.1	P ±0.1	T ±0.2
5X4	5.7	5.7	12.0	5.5	12.0	4.5
6.3X4	7.0	7.0	16.0	7.5	12.0	4.5


TAPING SPECIFICATIONS (mm)

- Both Leader and Trailer tape: Minimum 10 empty pockets and 20cm of cover tape.
- Connection: Maximum 3 connections (slices) per reel.

CARRIER

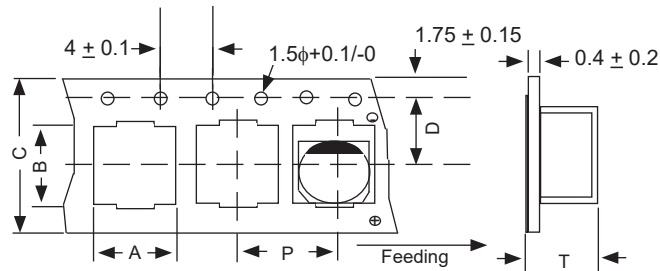

V-Chip 13" (330mm) Reels (B suffix)

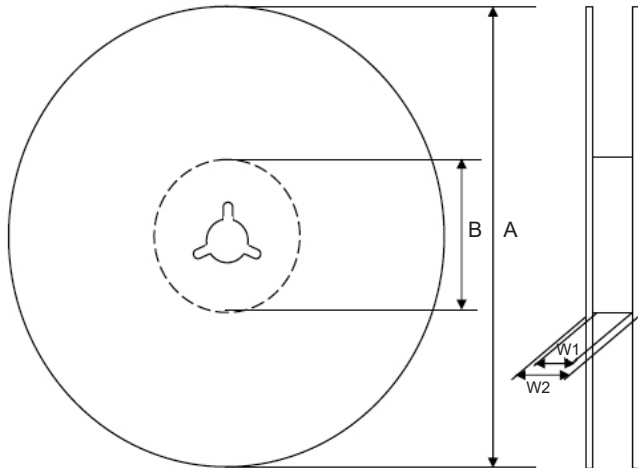


Dimensions (mm)

Case Size	Tape Width	W1	W2
5x4	12.0	12.4 ~ 14.4	15.5 ~ 20.0
6.3x4	16.0	16.4 ~ 18.4	19.5 ~ 24.0

Case Size	Tape Width	A	B	C	D	E
5x4	12.0	φ330	φ50~105	φ13	φ21	2.0
6.3x4	16.0	±2.0		±0.5	±1.0	±0.5

Color
Black or Blue



Case Size	Quantity Per Reel
	13" Reel
5X4	1,000 pcs
6.3X4	1,000 pcs

Review & Compare Reflow Soldering Heat Limits
V-chip SMT Aluminum Electrolytic Capacitors
www.niccomp.com/RSL