NIC Eurotech Ltd

Preliminary Information

ALUMINIUM SELECTION GUIDE

RADIAL LEADED & SURFACE MOUNT ALUMINIUM ELECTROLYTIC CAPACITOR SELECTION GUIDE

Easy-to-follow guidelines to aid in selecting/specifying leaded and SMT style Aluminium Electrolytic Capacitors.

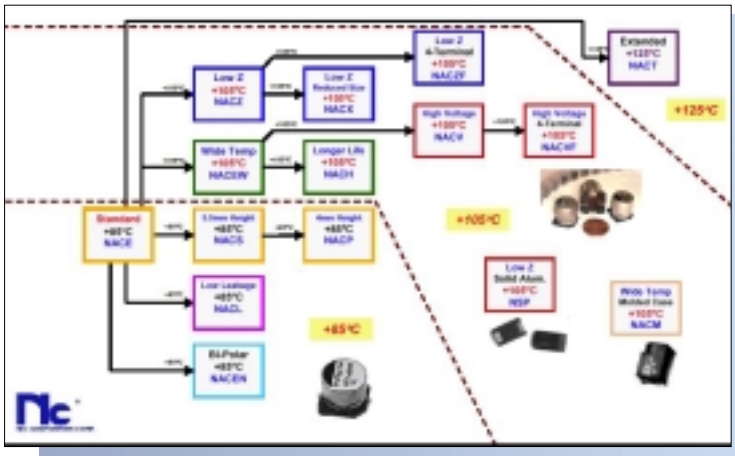

Preliminary Information

General Description

SURFACE MOUNT ALUMINIUM ELECTROLYTIC CAPACITOR SELECTION GUIDE

- Solid Aluminium
- +85°C
- +105°C
- +125°C
- Low Impedance
- High Voltage
- Low Leakage
- Low Profile
- Bi-Polar

RADIAL LEADED ALUMINIUM ELECTROLYTIC CAPACITOR SELECTION GUIDE

- +85°C
- +105°C
- +125°C
- Low Impedance
- High Voltage
- Low Leakage
- Low Profile
- Bi-Polar
- Sub-& Super-Miniature Sizes

© NIC Eurotech Ltd. All rights reserved.

FUTURE•ACTIVE INDUSTRIAL ELECTRONICS