


# Automotive Grade Thin Film Chip Resistors

NTRA Series

## FEATURES

- PRECISE TOLERANCE AND TEMPERATURE COEFFICIENT
- EIA STANDARD CASE SIZES (0402 ~ 2512)
- AEC-Q200 QUALIFIED FOR AUTOMOTIVE APPLICATIONS
- LOW NOISE, THIN FILM (NiCr) CONSTRUCTION
- TEMPERATURE RANGE -55°C ~ +155°C
- OPTIONAL HIGH POWER RATING (0603 ~ 2010 CASE SIZES)
- ANTI-SULFUR (EIA-977 SULFUR TEST  $\Delta R \pm 1\%$ )

*Automotive Grade Resistors*



**RoHS Compliant**

includes all homogeneous materials

\*See Part Number System for Details

## STANDARD POWER RATING

Type	EIA Size	Power Rating at 70°C	Max.*1 Working Voltage	Max.*2 Overload Voltage	Resistance Tolerance (Code)	Temperature Coefficient (ppm/°C)	Resistance Range (Ω)	Resistance Values
NTRA04	0402	1/16W (0.063W)	25V	50V	±0.05% (A), ±0.1% (B), ±0.25 (C), ±0.5 (D), ±1% (F)	±10(B)	49.9 ~ 10KΩ	E-24, E-96 & E-192
					±0.05% (A)	±15(N)	49.9 ~ 10KΩ	
					±0.1% (B), ±0.25 (C), ±0.5 (D), ±1% (F)		49.9 ~ 69.8KΩ	
					±0.05% (A)	±25(C), ±50(D)	49.9 ~ 10KΩ	
±0.1% (B), ±0.25 (C), ±0.5 (D), ±1% (F)	49.9 ~ 100KΩ							
NTRA06	0603	1/16W (0.063W)	50V	100V	±0.05% (A)	±10(B), ±15(N), ±25(C), ±50(D)	10 ~ 49.9KΩ	
					±0.1% (B), ±0.25 (C), ±0.5 (D), ±1% (F)	10 ~ 332KΩ		
NTRA10	0805	1/10W (0.10W)	100V	200V	±0.05% (A)	±10(B), ±15(N), ±25(C), ±50(D)	10 ~ 100KΩ	
					±0.1% (B), ±0.25 (C), ±0.5 (D), ±1% (F)	±10(B)	10 ~ 511KΩ	
					±0.1% (B), ±0.25 (C), ±0.5 (D), ±1% (F)	±15(N), ±25(C), ±50(D)	10 ~ 1MΩ	
NTRA12	1206	1/8W (0.125W)	150V	300V	±0.05% (A)	±10(B), ±15(N), ±25(C), ±50(D)	10 ~ 200KΩ	
					±0.1% (B), ±0.25 (C), ±0.5 (D), ±1% (F)	10 ~ 1MΩ		
NTRA20	1210	1/4W (0.25W)	150V	300V	±0.05% (A)	±10(B), ±15(N), ±25(C), ±50(D)	10 ~ 499KΩ	
					±0.1% (B), ±0.25 (C), ±0.5 (D), ±1% (F)	10 ~ 1MΩ		
NTRA25	2010	1/4W (0.25W)	150V	300V	±0.05% (A)	±10(B), ±15(N), ±25(C), ±50(D)	10 ~ 499KΩ	
					±0.1% (B), ±0.25 (C), ±0.5 (D), ±1% (F)	10 ~ 1MΩ		
NTRA50	2512	1/2W (0.50W)	150V	300V	±0.05% (A)	±10(B), ±15(N), ±25(C), ±50(D)	10 ~ 499KΩ	
					±0.1% (B), ±0.25 (C), ±0.5 (D), ±1% (F)	10 ~ 1MΩ		

## HIGH POWER RATING

Type	EIA Size	Power Rating at 70°C	Max.*1 Working Voltage	Max.*2 Overload Voltage	Resistance Tolerance (Code)	Temperature Coefficient (ppm/°C)	Resistance Range (Ω)	Resistance Values
NTRA06H	0603	1/10W (0.10W)	75V	150V	±0.05% (A)	±10(B), ±15(N), ±25(C), ±50(D)	10 ~ 49.9KΩ	E-24, E-96 & E-192
					±0.1% (B), ±0.25 (C), ±0.5 (D), ±1% (F)	±25(C), ±50(D)	10 ~ 332KΩ	
NTRA10H	0805	1/8W (0.125W)	150V	300V	±0.05% (A)	±25(C), ±50(D)	10 ~ 100KΩ	
					±0.1% (B), ±0.25 (C), ±0.5 (D), ±1% (F)	±10(B)	10 ~ 511KΩ	
						±15(N), ±25(C), ±50(D)	10 ~ 1MΩ	
NTRA12H	1206	1/4W (0.25W)	200V	400V	±0.05% (A)	±10(B), ±15(N), ±25(C), ±50(D)	10 ~ 200KΩ	
					±0.1% (B), ±0.25 (C), ±0.5 (D), ±1% (F)	10 ~ 1MΩ		
NTRA20H	1210	1/3W (0.33W)	200V	400V	±0.05% (A)	±10(B), ±15(N), ±25(C), ±50(D)	10 ~ 499KΩ	
					±0.1% (B), ±0.25 (C), ±0.5 (D), ±1% (F)	10 ~ 1MΩ		
NTRA25H	2010	1/3W (0.33W)	200V	400V	±0.05% (A)	±10(B), ±15(N), ±25(C), ±50(D)	10 ~ 499KΩ	
					±0.1% (B), ±0.25 (C), ±0.5 (D), ±1% (F)	10 ~ 1MΩ		

Note \*1 - Maximum allowable continuous Working Voltage for all resistors is the lower of the two values:  
 "Maximum Working Voltage" as specified above  
 or

$$\sqrt{\text{Power rating (Watts)} \times \text{Resistance (Ohms)}}$$

Note \*2 - Maximum Overload Voltage for all resistors is the lower of the two values:  
 "Maximum Overload Voltage" as specified above  
 or


$$2.5 \times \sqrt{\text{Power rating (Watts)} \times \text{Resistance (Ohms)}}$$



### TYPICAL NOISE CHARACTERISTICS

Resistance Value ( $\Omega$ )	Case Size		
	0603	0805	1206
1 ~ 9	-95dB	-95dB	-95dB
10 ~ 49	-85dB	-85dB	-85dB
50 ~ 99	-85dB	-85dB	-85dB
100 ~ 4.99K	-100dB	-100dB	-105dB
5K ~ 19.9K	-100dB	-100dB	-100dB
20K ~ 1M	-90dB	-100dB	-100dB

**Power Derating Curve:** For operation above 70°C, power rating must be derated according to the following chart:

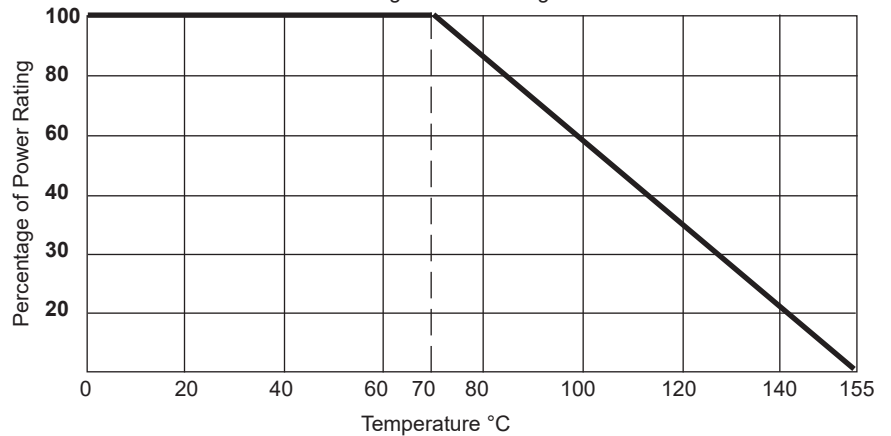

### ENVIRONMENTAL CHARACTERISTICS

Item	Specification		Test Method
	Tol. $\leq 0.05\%$	Tol. $> 0.05\%$	
Terminal Strength	None Broken		AEC-Q200-006 Force of 1.8kg for 60 seconds
Mechanical Shock	$\Delta R \pm 0.05\%$	$\Delta R \pm 0.1\%$	MIL-STD-202 Method 213 Wave Form: Tolerance for half sine shock pulse. Peak value is 100g's. Normal duration (D) is 6.
Vibration	$\Delta R \pm 0.05\%$	$\Delta R \pm 0.1\%$	MIL-STD-202 Method 204 5 g's for 20 minutes, 12 cycles each in 3 orientations, 10 ~ 2,000Hz
ESD	$\Delta R \pm 0.5\%$		AEC-Q200-002 0402 & 0603 = 0.2KV 0805 & 1206 = 1KV 1210, 2010 & 2512 = 2KV
Flammability	No ignition of the tissue paper or scorching of pinewood board		UL-94 V-0 or V-1 acceptable. Electrical test not required
Resistance to solvents	Marking unsmearred		MIL-STD-202 Method 215 Add aqueous wash chemical - OKEM Clean or equivalent. Do not use banned solvents
Sulfur Test	$\Delta R \pm 1\%$		ASTM-B-809-95 Modified $+105^\circ\text{C} \pm 2^\circ\text{C}$ no power for 750 hours
Temperature Coefficient of Resistance	As specified	As specified	JIS-C-5201-1 4.8, IEC-60115-1 4.8 $+25/-55/+25/+125/+25$
Short Time Overload	$\Delta R \pm 0.05\%$		JIS-C-5201-1 4.13, IEC-60115-1 4.13 RCWV x 2.5 or Max Overloading Voltage for 5 Seconds
Insulation Resistance	$> 1000\text{M}\Omega$		JIS-C-5201-1 4.6, IEC-60115-1 4.6 Apply 100Vdc for 1 minute
Operational Life	$\Delta R \pm 0.05\%$	$\Delta R \pm 0.2\%$	Condition D Steady State $T_a = +125^\circ\text{C}$ at derated power. Measurement at 24 $\pm$ 4 hours after conclusion of test
	$> 7\text{K}\Omega \Delta R \pm 0.2\%$		
	$\Delta R \pm 0.5\%$ for High Power		
Biased Humidity	$\Delta R \pm 0.1\%$		MIL-STD-202F Method 103 Total time 1,000, 85°C, 85%RH at 10% operating power

Item	Specification		Test Method
	Tol. ≤ 0.05%	Tol. > 0.05%	
High Temperature Exposure	ΔR ±0.2%		MIL-STD-202 Method 108 +155°C, 1000 hours
Temperature Cycling	ΔR ±0.1%		JESD22, Method JA-104 -55°C to +125°C, 1,000 cycles
Bending Strength	ΔR ±0.1%		JIS-C-5201-1 4.33 Bending once for 60 seconds Bending displacement: 2mm for 2010 & 2512 sizes, others 3mm
Solderability	95% Minimum Coverage		JIS-C-5201-1 4.17, IEC-60115-1 4.17 245°C ±5°C, 3 seconds
Resistance to Soldering Heat	ΔR ±0.05%		JIS-C-5201-1 4.18, IEC-60115-1 4.18 260°C ±5°C for 10 seconds

### STANDARD E-24, E-96 AND E-192 VALUES AND 0603 RESISTANCE CODES

E-24	E-96								E-192*					
Value	Value	Code	Value	Code	Value	Code	Value	Code	Value	Value	Value	Value	Value	Value
100	100	01	102	02	105	03	107	04	100	147	215	316	464	681
110	110	05	113	06	115	07	118	08	101	149	218	320	470	690
120	121	09	124	10	127	11	130	12	102	150	221	324	475	698
130	133	13	137	14	140	15	143	16	104	152	223	328	481	706
150	147	17	150	18	154	19	158	20	105	154	226	332	487	715
160	162	21	165	22	169	23	174	24	106	156	229	336	493	723
180	178	25	182	26	187	27	191	28	107	158	232	340	499	732
200	196	29	200	30	205	31	210	32	109	160	234	344	505	741
220	215	33	221	34	226	35	232	36	110	162	237	348	511	750
240	237	37	243	38	249	39	255	40	111	164	240	352	517	759
270	261	41	267	42	274	43	280	44	113	165	243	357	523	768
300	287	45	294	46	301	47	309	48	114	167	246	361	530	777
330	316	49	324	50	332	51	340	52	115	169	249	365	536	787
360	348	53	357	54	365	55	374	56	117	172	252	370	542	796
390	383	57	392	58	402	59	412	60	118	174	255	374	549	806
430	422	61	432	62	442	63	453	64	120	176	258	379	556	816
470	464	65	475	66	487	67	499	68	121	178	261	383	562	825
510	511	69	523	70	536	71	549	72	123	180	264	388	569	835
560	562	73	576	74	590	75	604	76	124	182	267	392	576	845
620	619	77	634	78	649	79	665	80	126	184	271	397	583	856
680	681	81	698	82	715	83	732	84	127	187	274	402	590	866
750	750	85	768	86	787	87	806	88	129	189	270	407	597	876
820	825	89	845	90	866	91	887	92	130	191	280	412	604	887
910	909	93	931	94	953	95	976	96	132	193	284	417	612	898
									133	196	287	422	619	909
									135	198	291	427	626	920
									137	200	294	432	634	931
									138	203	298	437	642	942
									140	205	301	442	649	953
									142	208	305	448	657	965
									143	210	309	453	665	976
									145	213	312	459	673	988

\* Special E192 resistance values are supported on all case sizes of NTRA series. Please review your E192 value requirements with NIC, as special terms apply, and E192 values are supplied without component resistance value marking.


#### MULTIPLIER CODE

Code	A	B, b	C	D, d	E	F	G	H	X	Y	Z
Multiplier	10 <sup>0</sup>	10 <sup>1</sup>	10 <sup>2</sup>	10 <sup>3</sup>	10 <sup>4</sup>	10 <sup>5</sup>	10 <sup>6</sup>	10 <sup>7</sup>	10 <sup>-1</sup>	10 <sup>-2</sup>	10 <sup>-3</sup>

## PART MARKING

- No marking on 0402 case size.
- Marking for 0603 case size:  
 E-24 values and E-96 values:  $\pm 1\%$  (F),  $\pm 0.5\%$  (D),  $\pm 0.25\%$  (C),  $\pm 0.1\%$  (B) tolerances  
 E-192 values:  $\pm 0.1\%$  (B) tolerance (No Marking)

### CODING FORMULA




Example:  $10.2k\Omega = \frac{102}{02} \times \frac{10^2}{C} \Omega = 02C$   
 $33.2 \Omega = \frac{332}{51} \times \frac{10^{-1}}{X} = 51X$

### MARKING EXAMPLES

$10\Omega = 01X$   
 $7.5k\Omega = 85B$   
 $150k\Omega = 18D$   
 $1 \text{ Meg}\Omega = 01E$



- Marking for 0805, 1206, 2010 and 2512 case sizes:  
 E-24 and E-96 values -  $\pm 1\%$ (F),  $\pm 0.5\%$  (D),  $\pm 0.25\%$ (C),  $\pm 0.1\%$  (B) tolerances  
 E-192 values:  $\pm 0.1\%$  (B) tolerance (No Marking)
- 4 DIGIT MARKING SYSTEM - First 3 digits are the significant figures, the 4th digit is the multiplier. "R"= decimal point.  
 Examples: 0R10 = 0.10 ohms, 1R00 = 1.0 ohms, 22R1=22.1 ohms, 3320= 332 ohms, 4751=4.75K ohms,  
 1132=11.3K ohms, 6493=649K ohms

### PART NUMBER SYSTEM

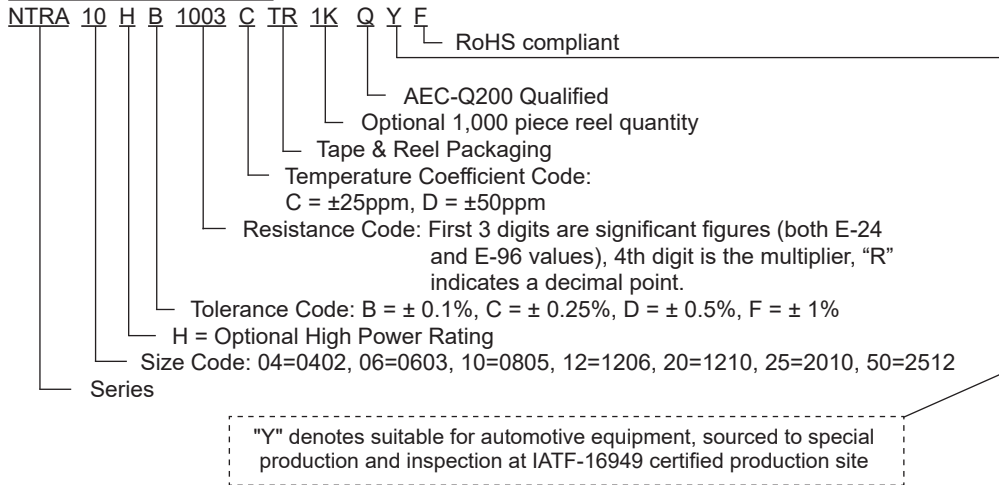

### DIMENSIONS (mm)

Type	EIA Size	L	W	H	T	t
NTRA04	0402	1.00 ± 0.05	0.50 ± 0.05	0.30 ± 0.05	0.20 ± 0.10	0.20 ± 0.10
NTRA06	0603	1.55 ± 0.10	0.80 ± 0.10	0.45 ± 0.10	0.30 ± 0.20	0.30 ± 0.20
NTRA10	0805	2.00 ± 0.15	1.25 ± 0.15	0.55 ± 0.10	0.30 ± 0.20	0.40 ± 0.25
NTRA12	1206	3.05 ± 0.15	1.55 ± 0.15	0.55 ± 0.10	0.42 ± 0.20	0.35 ± 0.25
NTRA20	1210	3.10 ± 0.15	2.40 ± 0.15	0.55 ± 0.10	0.40 ± 0.20	0.55 ± 0.25
NTRA25	2010	4.90 ± 0.15	2.40 ± 0.15	0.55 ± 0.10	0.60 ± 0.30	0.50 ± 0.25
NTRA50	2512	6.30 ± 0.15	3.10 ± 0.15	0.55 ± 0.10	0.60 ± 0.30	0.50 ± 0.25

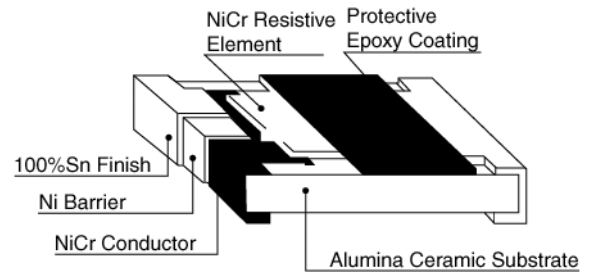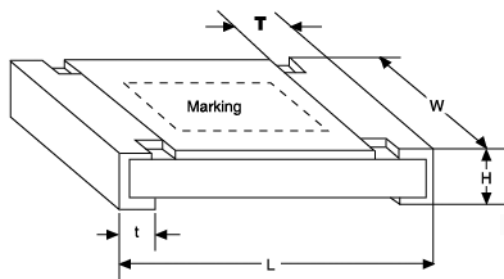

### TAPING SPECIFICATIONS

#### (1) Availability


Type	EIA Size	Carrier Tape			Qty per Reel (pcs)	
		Fig.	Material	Width (mm)	Standard	Optional
NTRA04	0402	A	Paper	9.5 ± 1.0	10,000	1,000
NTRA06	0603	A				
NTRA10	0805	A			5,000	1,000
NTRA12	1206	A				
NTRA20	1210	A				
NTRA25	2010	B	Plastic	13.5 ± 10.0	4,000	1,000
NTRA50	2512	B				

#### (2) PAPER TAPE DIMENSIONS (mm)

FIG. A

Type	EIA Size	A	B	D	E	F	P <sub>0</sub>	P <sub>1</sub>	P <sub>2</sub>	W	T
NTRA04	0402	0.70 ± 0.05	1.16 ± 0.05	1.55 ± 0.05	1.75 ± 0.10	3.50 ± 0.05	4.0 ± 0.10	2.0 ± 0.05	2.0 ± 0.05	8.0 ± 0.1	0.40 ± 0.03
NTRA06	0603	1.10 ± 0.05	1.90 ± 0.05					0.60 ± 0.03			
NTRA10	0805	1.60 ± 0.05	2.37 ± 0.05					0.75 ± 0.05			
NTRA12	1206	2.00 ± 0.05	3.55 ± 0.05	1.6 ± 0.1				4.0 ± 0.10			
NTRA20	1210	2.75 ± 0.05	3.40 ± 0.05								


FIG. A

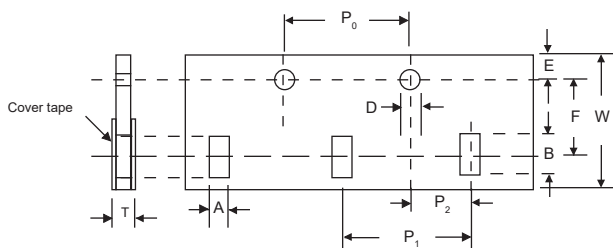

### (3) PLASTIC EMBOSSED TAPE DIMENSIONS (mm)

FIG. B

Type	EIA Size	A	B	D	E	F	P <sub>0</sub>	P <sub>1</sub>	P <sub>2</sub>	W	T
NTRA25	2010	2.85 ±0.10	5.45 ±0.10	1.50 ±0.10	1.75 ±0.10	5.50 ±0.05	4.0 ±0.10	4.0 ±0.1	2.0 ±0.05	12.0 ±0.1	1.0 ±0.20
NTRA50	2512	3.40 ±0.10	6.65 ±0.10								

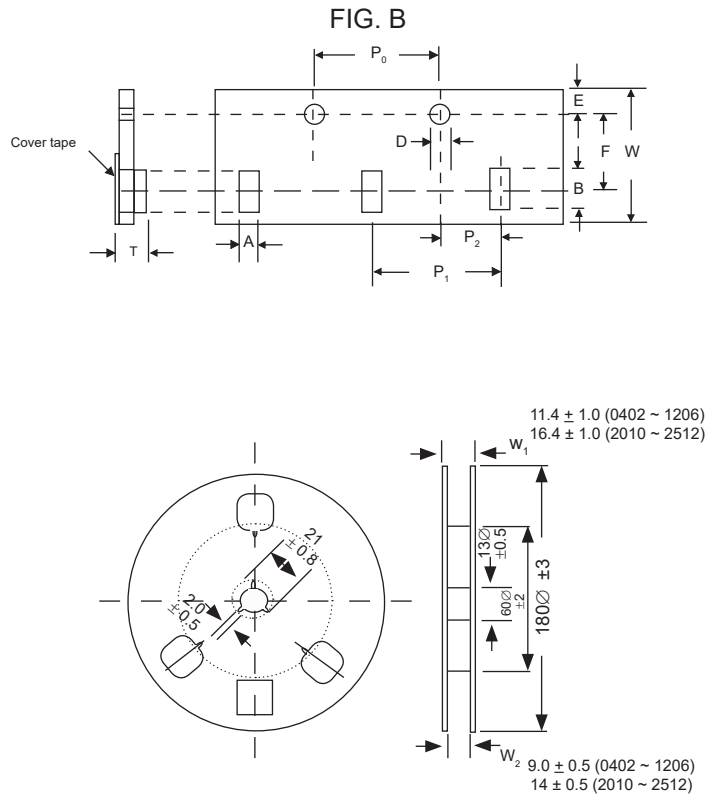

### LAND PATTERN DIMENSIONS (mm)

Type	EIA Size	A	B	C
NTRA04	0402	0.50	0.50	0.60 ± 0.2
NTRA06	0603	0.80	1.00	0.90 ± 0.2
NTRA10	0805	1.00	1.00	1.35 ± 0.2
NTRA12	1206	2.00	1.15	1.70 ± 0.2
NTRA20	1210	2.00	1.15	2.50 ± 0.2
NTRA25	2010	3.60	1.40	2.50 ± 0.2
NTRA50	2512	4.90	1.60	3.10 ± 0.2

**Reflow Soldering Heat Profile and Limits**  
 → [www.niccomp.com/resource/files/resistive/NIC-ChipR-Reflow-Sept2020-Rev2.pdf](http://www.niccomp.com/resource/files/resistive/NIC-ChipR-Reflow-Sept2020-Rev2.pdf)  
 Wave soldering? – Please review your wave soldering process profile with NIC: [tpmg@niccomp.com](mailto:tpmg@niccomp.com)

