

### FEATURES


- IDEAL WHERE COMPONENT HEIGHT IS LIMITED
- AVAILABLE ON 8 ~ 18mm DIAMETER RADIAL LEADED ALUMINUM ELECTROLYTIC CAPACITORS WITH WIRE LEADS\*

\*Available on most radial aluminum electrolytic capacitor series. Contact NIC to con rm.




### HORIZONTAL MOUNT LEAD FORMING CODES AND DIMENSIONS (mm)

Case Dia. (D $\phi$ )	8				10 & 12				16 & 18			
Lead Dia. ( $\phi$ d)	0.6				0.6				0.8			
Lead Space (F)	3.5				5.0				7.5			
Forming Code	RI	RK	RX	SG	RI	RK	RX	SG	RI	RK	RX	SG
Forming Type	A	B	A	B	A	B	A	B	A	B	A	B
Lead Length (H)	4.0	4.0	3.5	3.5	4.0	4.0	3.5	3.5	4.0	4.0	3.5	3.5

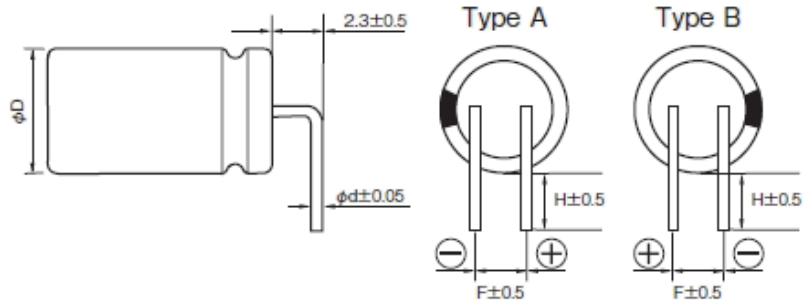

### PART NUMBERING SYSTEM

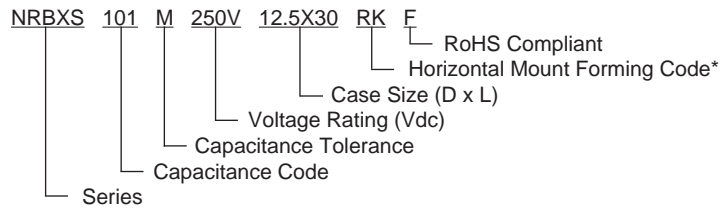

\* Choose the correct forming code for the polarity orientation and lead length required for the application.