




**NIC COMPONENTS CORP.**

70 Maxess Road • Melville, New York 11747  
(516) 936-7500 • Fax (516) 396-7575

## TAPED COMPONENT DIMENSIONS

**PRODUCTS: RADIAL LEADED FILM CAPACITORS**

*Example P/N: NRM103K400TR*

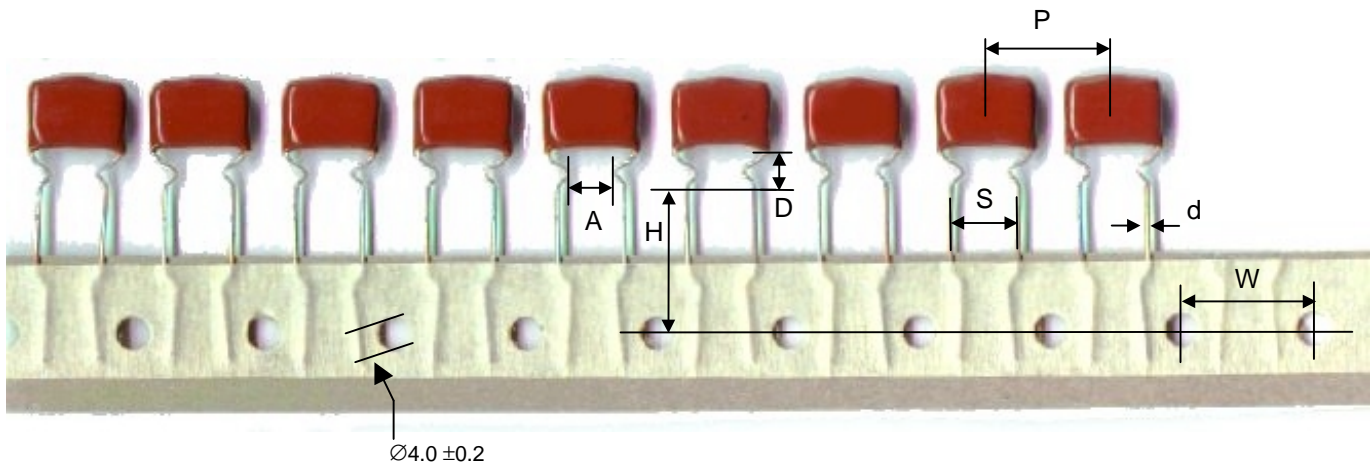

<b>DIMENSION</b>	<b>SPEC.</b>	<b>TOL.</b>	<b>DESCRIPTION</b>
A	2.0	-0.4 +1.0	Inside minimum distance of lead crimp
D	5.0	Max.	Bottom of coating rundown to form return
H	16.0	$\pm 0.5$	Bottom of coating rundown to center of Hole
S	5.0	$\pm 0.5$	Lead Spacing
P	12.7	$\pm 0.3$	Component Pitch
W	12.7	$\pm 0.3$	Hole Pitch
d	0.6	$\pm 0.05$	Lead Diameter

Maximum Case Size that can be taped is 10mm length

ISO 9002 REGISTERED