

NANF62X7AUS0R433G1F

433 MHz ISM FPC Antenna



Features


- Support ISM/LoRa & Sigfox Bands, 433 MHz
- Stable and Reliable Performance
- Customizable Cable and Connector
- RoHS & REACH Compliant



Applications

- ISM 433 Band
- Smart Meters
- Wireless alarm and security system
- Industrial monitoring and control
- IOT applications

Part Number Breakdown

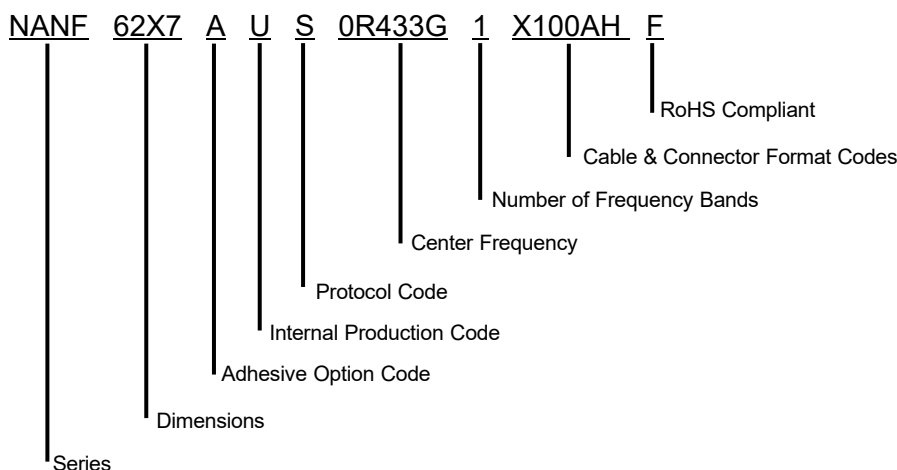

Standard Part Number Breakdown


Part Numbers	Connector Type	Cable Length	Cable Type	Cable Orientation
NANF62X7AUS0R433G1X100AHF	IPEX MHF (X)	100 mm	RF1.13 (A)	Horizontal

The table represents assembled part numbers available on www.niccomp.com from standard connector and cable options. For options not listed above please contact NIC"

Specifications

Electrical	
Frequency Range	428 ~438 MHz
Frequency	433 MHz
Peak Gain (typ.)	-0.8 dBi
V.S.W.R	2.0 Max.
Efficiency (typ.)	35.6%
Polarization	Linear
Impedance	50Ω
Mounting method	Adhesive
Environmental	
Operating Temperature	-40°C~+85°C
Storage Temperature	-5°C~+40°C
Relative Humidity	10 ~ 70%
RoHS Complaint	Yes

Dimensions

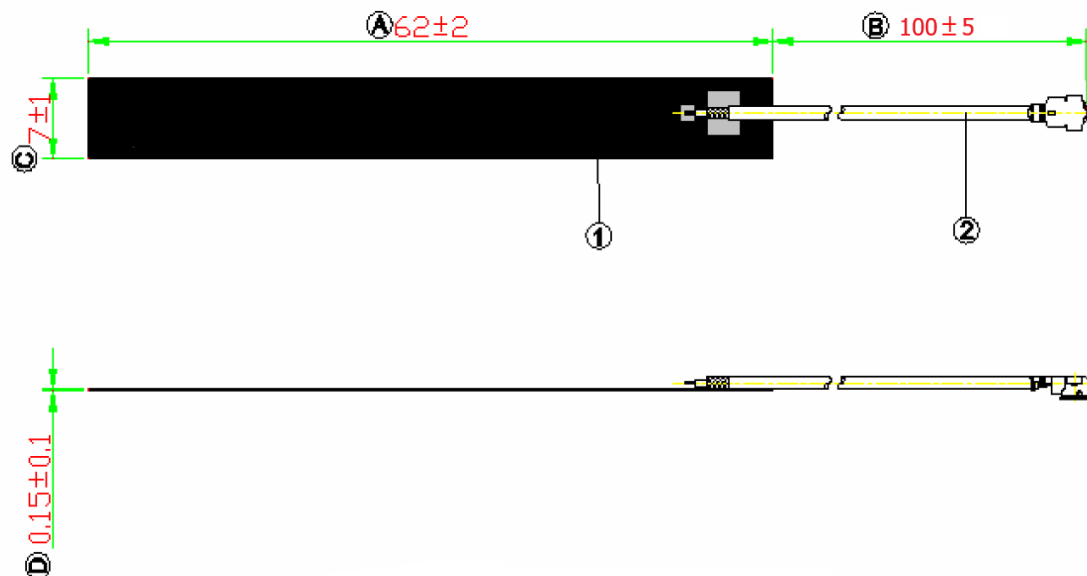


NANF62X7AUS0R433G1F

433 MHz ISM FPC Antenna




Antenna Parameters:

Return Loss




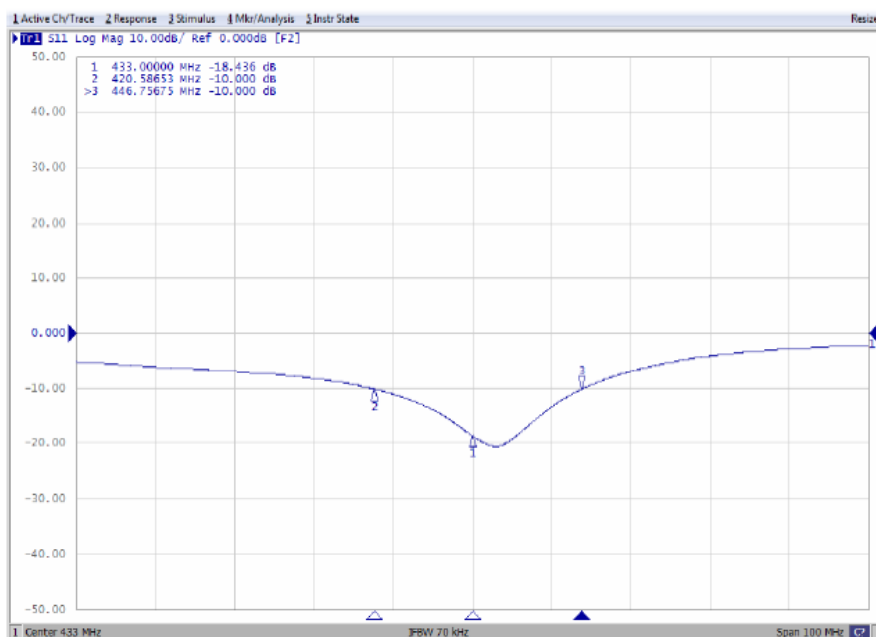


Smith Chart

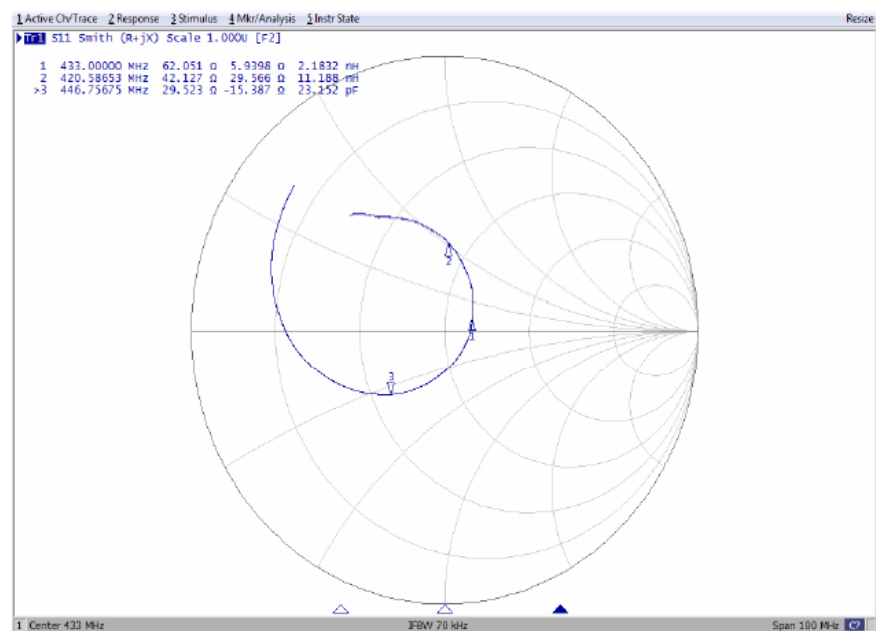

Radiation Patterns

3D Gain Patterns @ 433 MHz

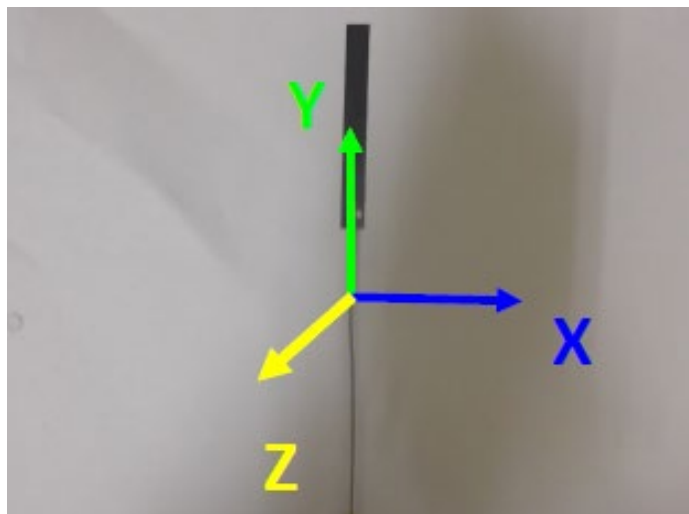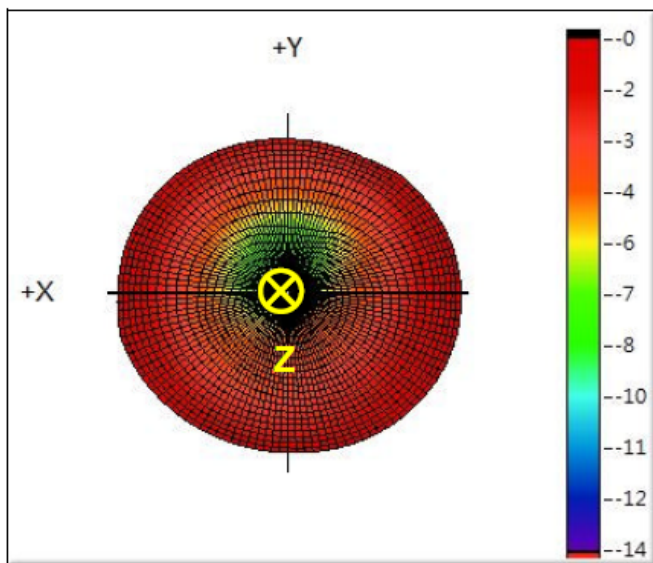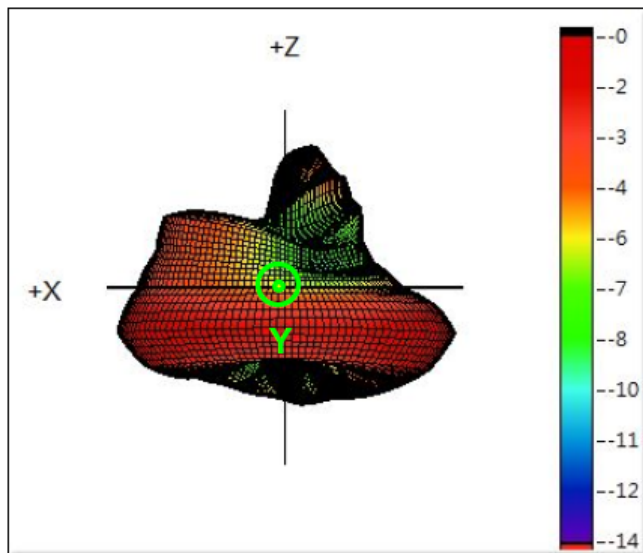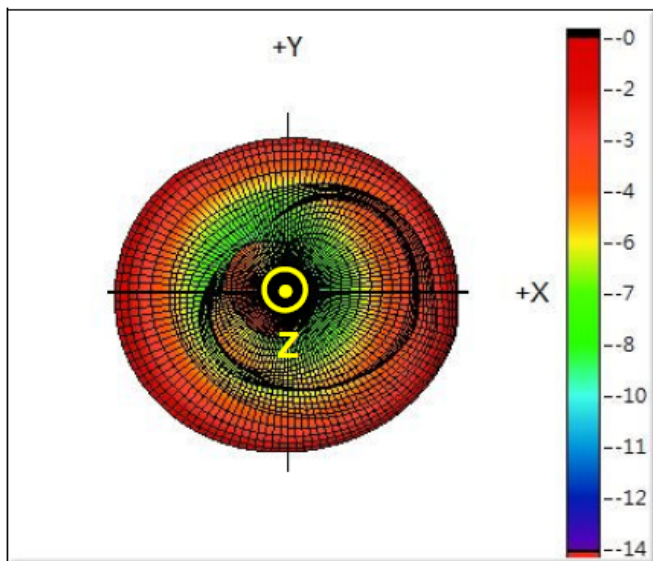

NANF62X7AUS0R433G1F

433 MHz ISM FPC Antenna



Efficiency Table

Frequency(MHz)	428	429	430	431	432	433	434	435	436	437	438
Efficiency(dB)	-4.5	-4.5	-4.3	-4.4	-4.5	-4.5	-4.3	-4.2	-4.2	-4.3	-4.5
Efficiency(%)	35.1	35.6	36.8	36.3	35.5	35.6	37.0	37.9	37.9	37.3	35.7
Peak Gain(dBi)	-0.9	-0.7	-0.8	-0.8	-0.8	-0.8	-0.6	-0.6	-0.7	-0.7	-0.8

Efficiency vs. Frequency

