


NGAW0603S2R450GS1TRF

2.4 GHz Multilayer Chip Antenna



Features

- Bluetooth/WIFI Protocols
- Support: 2.4 GHz Frequency
- Small Case Size:0603 (1.6 x 0.8mm)
- RoHs Complaint




Applications

- Home RF System
- Tracking
- Monitoring

Specifications

Electrical	
Frequency Range	2400 - 2480 MHz
Peak Gain	1.1 dBi
Return Loss	9.5 dB min.
Impedance	50Ω
Power Capacity	2 W max.
Environmental	
Operating Temperature -	-40°C~+85°C
Storage Temperature	-10°C~ +40°C
Relative Humidity	70% (Max)
ROHS Compliant	Yes

Part Number Breakdown

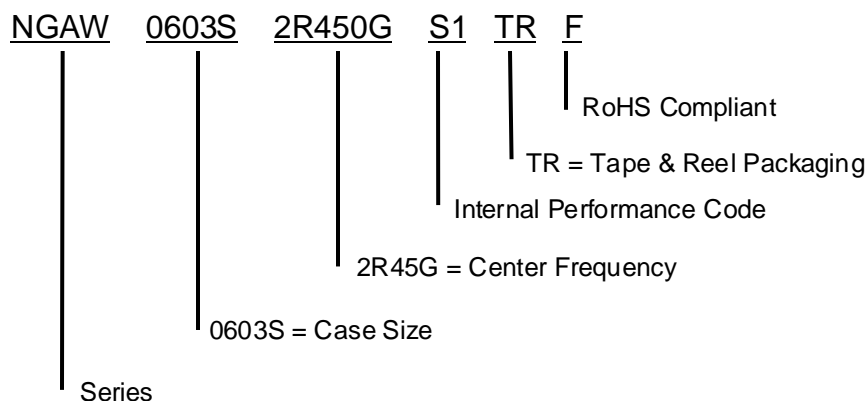


NGAW0603S2R450GS1TRF

2.4 GHz Multilayer Chip Antenna




Dimension Drawing & Dimensions (mm)

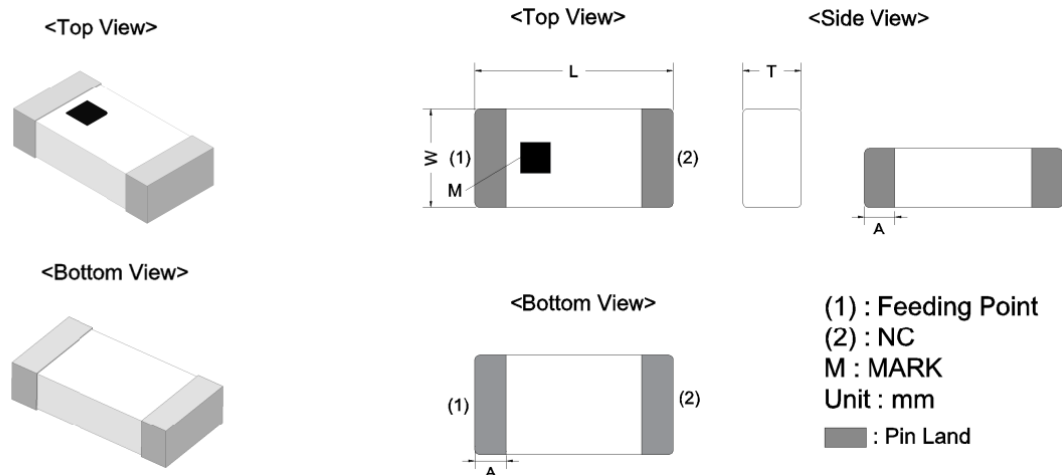

Mark	L	W	T	A
Dimensions (mm)	1.6 ± 0.10	0.80 ± 0.1	0.45 Max	0.25 ± 0.1

Recommended Land Pattern

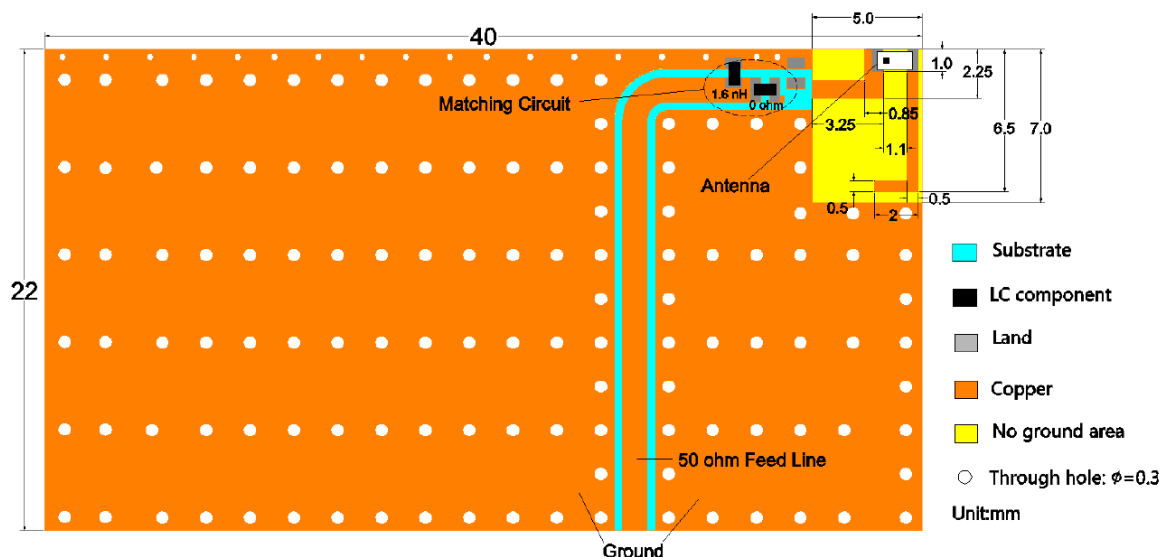


*The matching circuits and LC component values are based on our evaluation board. The actual matching circuits need to be adjusted when the antenna is applied in the customer's design, because the antenna impedance is easily affected by PCB layout

NGAW0603S2R450GS1TRF

2.4 GHz Multilayer Chip Antenna



Electrical Performance

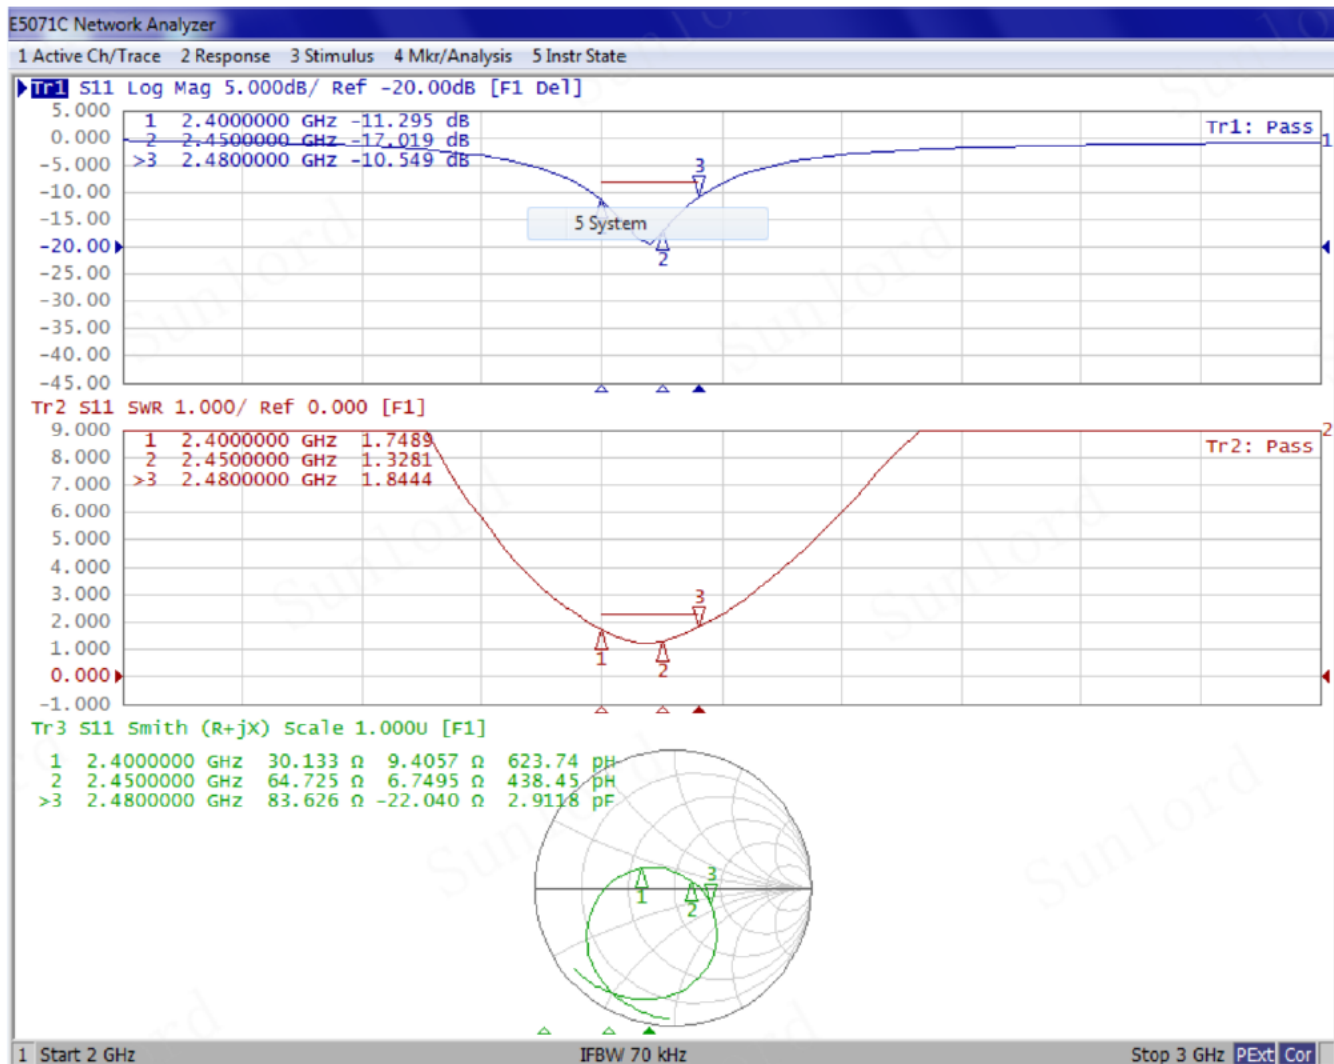

Test Conditions

Unless otherwise specified, the standard atmospheric conditions for measurement/test as:

- Ambient Temperature: $20 \pm 15^{\circ}\text{C}$
- Relative Humidity: $65 \pm 20\%$
- Air Pressure: 86 Pa to 106 KPa

If any doubt on the results, measurements/tests should be made within the following limits:





- Ambient Temperature: $20 \pm 2^{\circ}\text{C}$
- Relative Humidity: $65 \pm 5\%$
- Air Pressure: 86 KPa to 106 KPa

Gain and Efficiency at 2400 – 2500 MHz




Frequency (MHz)	Efficiency (%)	Gain (dBi)
2400	38.47	0.66
2410	39.51	0.89
2420	40.99	1.07
2430	40.20	1.07
2440	40.89	1.13
2450	39.62	1.00
2460	38.95	0.93
2470	39.07	0.94
2480	37.41	0.77




2D Radiation Patterns @ 2450 MHz

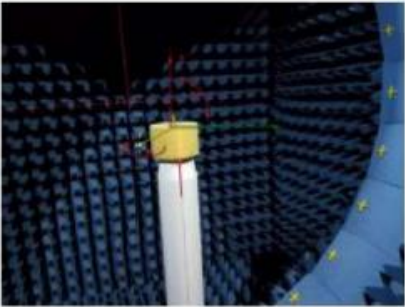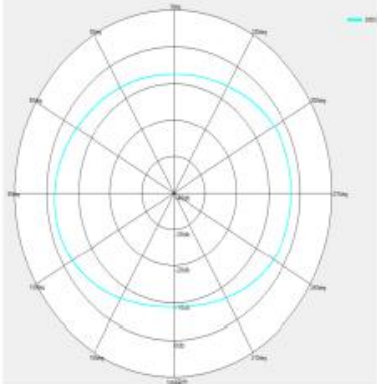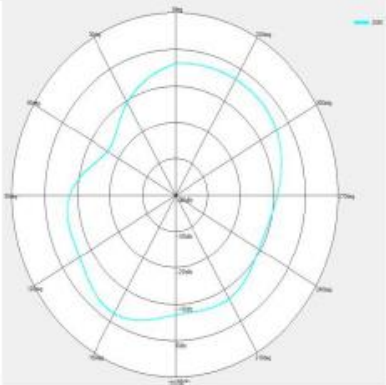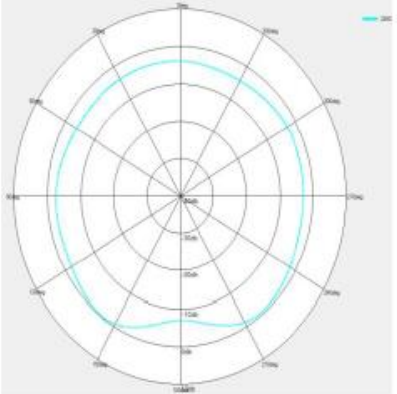	Direction	
	XOY Plane	
	XOZ Plane	
	YOZ Plane	

Reliability Test

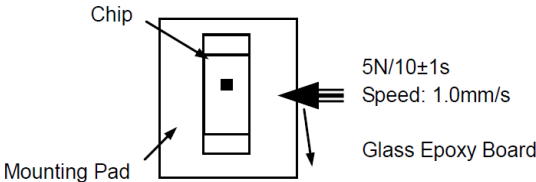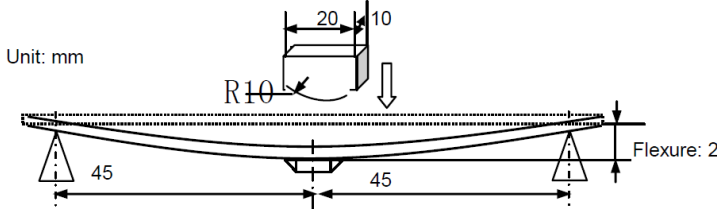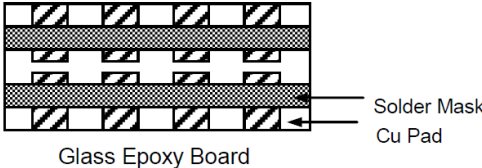Items	Requirements	Test Methods and Remarks
Terminal Strength	No visible mechanical damage	<ol style="list-style-type: none"> Solder the inductor to the testing jig (glass epoxy board shown as the following figure) using leadfree solder. Then apply a force in the direction of the arrow 5N force for 0603 series Keep time: 10 ± 1 sec 
Resistance to Fixture	No visible mechanical damage	<ol style="list-style-type: none"> Solder the chip to the test jig (glass epoxy board) using a leadfree solder. Then apply a force in the direction shown as the following figure. Flexure: 2 mm Pressurizing Speed: 0.5mm/sec Keep time: ≥ 30 sec 
Vibration	No visible mechanical damage	<ol style="list-style-type: none"> Solder the chip to the testing jig (glass epoxy board shown as the following figure) using leadfree solder. The chip shall be subjected to a simple harmonic motion having total amplitude of 1.5mm, the frequency being varied uniformly between the approximate limits of 10 and 55 Hz The frequency range from 10 to 55 Hz and return to 10 Hz shall be traversed in approximately 1 minute. This motion shall be applied for a period of 2 hrs. in each 3 mutually perpendicular directions (total of 6 hrs.) 

Reliability Test

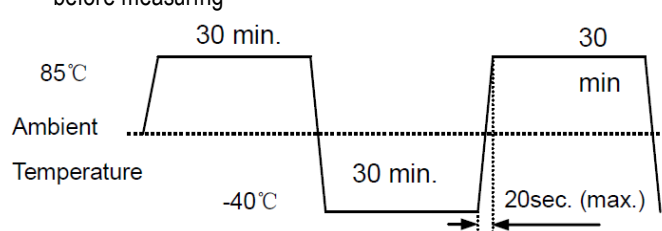
Dropping	No visible mechanical damage	Drop the chip 10 times on a concrete floor from the height of 100 cm.
Solderability	1) No visible mechanical damage 2) Wetting shall be exceeded 75% coverage	1. Solder temperature: $240 \pm 2^{\circ}\text{C}$ 2. Duration: 3 sec 3. Solder: Sn/3.0Ag/0.5Cu 4. Flux: 25% Resin and 75% ethanol in weight
Resistance to Soldering Heat	No visible mechanical damage	1. Solder temperature: $260 \pm 2^{\circ}\text{C}$ 2. Duration: 5 sec 3. Solder: Sn/3.0Ag/0.5Cu 4. Flux: 25% Resin and 75% ethanol in weight 5. The chip shall be stabilized at normal condition for 1 ~ 2 hrs before measuring
Thermal Shock	1) No visible mechanical damage 2) Satisfy electrical characteristic	1. Temperature and time: -40°C for 30 ± 3 min \rightarrow 85°C for 30 ± 3 min 2. Transforming interval: Max. 20 sec 3. Tested cycle: 100 cycles 4. The chip shall be stabilized at normal condition for 1 ~ 2 hours before measuring  <p>The diagram shows a temperature profile starting at 'Ambient Temperature'. It rises to 85°C and holds for 30 min. It then falls to -40°C and holds for 30 min. It rises back to 85°C and holds for 30 min. The transition times are labeled as 20sec. (max.).</p>
Damp Heat (Steady States)	1) No visible mechanical damage 2) Satisfy electrical characteristic	1. Temperature: $60 \pm 2^{\circ}\text{C}$ 2. Humidity: 90% to 95% RH 3. Duration: 500^{+24} hours 4. The chip shall be stabilized at normal condition for 1~2 hours before measuring
Resistance to High Temperature	1) No visible mechanical damage 2) Satisfy electrical characteristic	1. Temperature: $85 \pm 2^{\circ}\text{C}$ 2. Duration: 500^{+24} hours 3. The chip shall be stabilized at normal condition for 1~2 hours before measuring



Packaging


Type	1608[0603]
Tape	Paper Tape
Quantity	4K

Taping Drawings (Unit: mm)

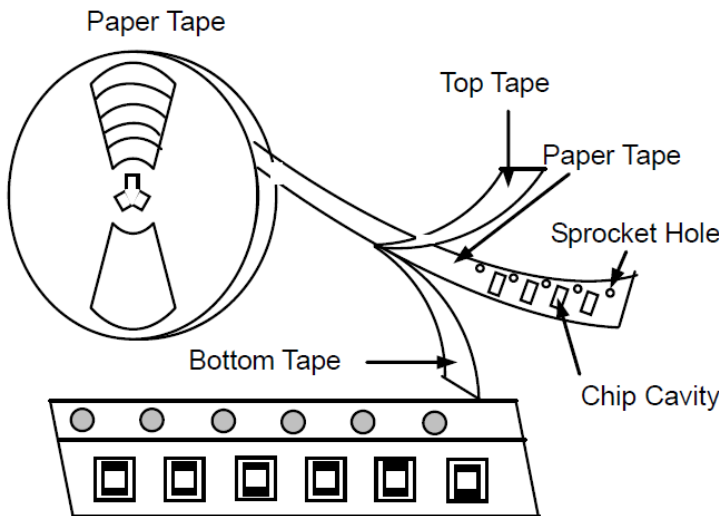

Remark: The sprocket holes are to the right as the tape is pulled toward the user.

Taping Dimensions (Unit: mm)

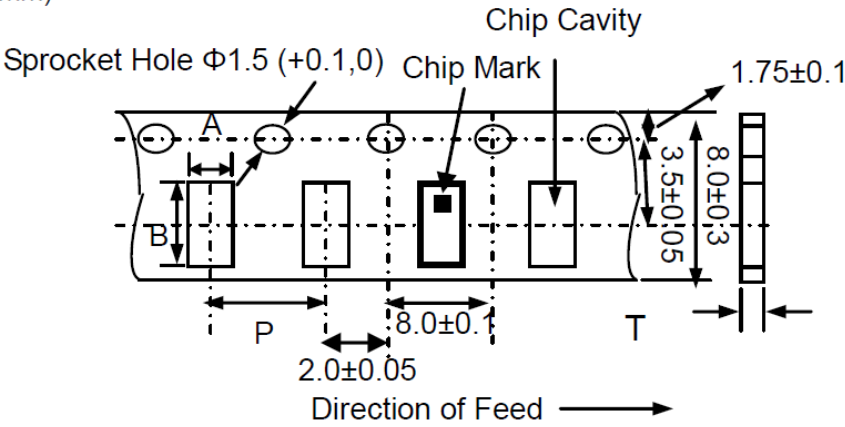


Type	Chip Thickness	A	B	P	T
Dimensions (mm)	0.45 max	1 ± 0.1	1.8 ± 0.1	4 ± 0.1	0.5 ± 0.1

NGAW0603S2R450GS1TRF

2.4 GHz Multilayer Chip Antenna



Reel Dimensions (Unit: mm)

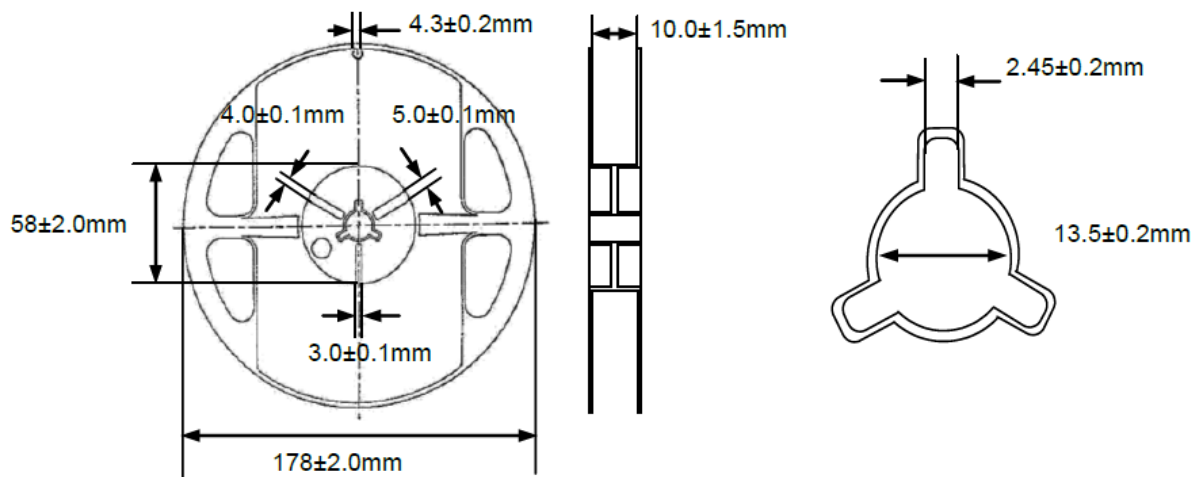


- The solderability of the external electrode may be deteriorated if packages are stored where they are exposed to high humidity. Package must be stored at 40°C or less and 70 % RH or less
- The solderability of the external electrode may be deteriorated if packages are stored where they are exposed to dust of harmful gas (e.g. HCl, sulfurous gas of H₂S)
- Packaging material may be deformed if package stored where they are exposed to heat of direct sunlight
- Resistance to Soldering heat shall be guaranteed for 6 months from the date of delivery on condition that they are stored at the environment specified in the testing conditions. For those parts, which passed more than 6 months shall be checked solder-ability before use.

Recommended Soldering Technologies

Re-flowing Profile

- Preheat condition: 150 ~ 200°C / 60 ~ 120 sec.
- Allowed time above 217 °C: 60 ~ 90 sec.
- Max temp: 260 °C
- Max time at max temp: 10 sec.
- Solder paste: Sn/3.0Ag/0.5Cu
- Allowed Reflow time: 2x max

[Note: the reflow profile in the above table is only for qualification and is not meant to specify board assembly profiles. Actual board assembly profiles must be based on the customer's specific board design. Solder paste and process, and should not exceed the parameters as the Reflow profile shows]

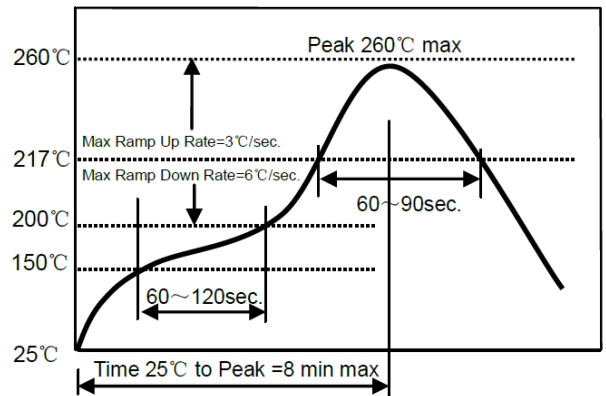

Iron Soldering Profile

- Iron soldering power: Max 30W
- Pre-heating: 150 °C / 60 sec.
- Soldering Tip temperature: 350 °C max.
- Soldering time: 3 sec max
- Solder paste: Sn/3.0Ag/0.5Cu
- Max.1 time for iron soldering

[Note: Take care not to apply the tip of the soldering iron to the terminal electrodes.]

