

NRE-JL Series

Radial Leaded Aluminum Electrolytic Capacitors



ULTRA LOW IMPEDANCE, RADIAL LEADS, POLARIZED, ALUMINUM ELECTROLYTIC

FEATURES

- VERY LOW IMPEDANCE & HIGH RIPPLE CURRENT
- LONG LIFE AT 105°C (4000 ~ 10,000 hrs.)
- HIGH STABILITY AT LOW TEMPERATURE
- IDEALLY FOR SWITCHING POWER SUPPLIES & CONVERTORS
- **MEETS THE REQUIREMENTS OF AEC-Q200***


*Contact NIC for supporting test data



CHARACTERISTICS

Rated Voltage Range	6.3 ~ 100Vdc									
Capacitance Range	1.0 ~ 15,000 μ F									
Operating Temperature Range	-40°C ~ +105°C									
Capacitance Tolerance	\pm 20% (M)									
Maximum Leakage Current After 2 Minutes at 20°C	0.01CV or 3 μ A whichever is greater									
Max. Tan δ at 120Hz/20°C	W.V. (Vdc)	6.3	10	16	25	35	50	63	100	
	S.V. (Vdc)	8	13	20	32	44	63	79	125	
	C \leq 1,000 μ F	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08	
	C = 2,200 μ F	0.24	0.21	0.18	0.16	0.14	0.12	-	-	
	C = 3,300 μ F	0.26	0.23	0.20	0.18	0.16	-	-	-	
	C = 4,700 μ F	0.28	0.25	0.22	0.20	-	-	-	-	
	C = 6,800 μ F	0.32	0.29	0.26	-	-	-	-	-	
	C = 8,200 μ F	-	-	-	0.28	-	-	-	-	
	C = 10,000 μ F	0.40	0.37	-	-	-	-	-	-	
Low Temperature Stability Impedance Ratio @ 120Hz	Z-25°C/Z+20°C	4	3	2	2	2	2	2	2	
	Z-40°C/Z+20°C	8	6	4	3	3	3	3	3	
Load Life Hours Load Life Test at Rated W.V. & 105°C	Case Diameter	6.3V to 10V			16V to 100V					
	ϕ 5mm	4,000			5,000					
	ϕ 6.3mm & ϕ 8mm	6,000			7,000					
	ϕ 10mm ~ ϕ 16mm	8,000			10,000					
	Capacitance Change	Within \pm 25% (6.3V \pm 30%) of initial measured value								
	Tan δ	Less than 200% of specified value								
	Leakage Current	Less than specified value								
Shelf Life Test 105°C 1,000 Hours No Load	Capacitance Change	Within \pm 25% of initial measured value								
	Tan δ	Less than 200% of specified value								
	Leakage Current	Less than specified value								

PART NUMBER SYSTEM

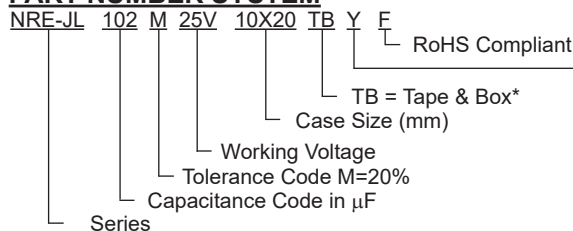

*see tape specification for details

Optional: Suitable for automotive equipment, sourced to special production and inspection at IATF-16949 certified production site

PRECAUTIONS

Please review the notes on correct use, safety and precautions found at <https://www.niccomp.com/resource/files/aluminum/AlumApplInfoCautions.pdf>
If in doubt or uncertainty, please review your specific application - process details with NIC's technical support personnel: tpmg@niccomp.com

NRE-JL Series

Radial Leaded Aluminum Electrolytic Capacitors



STANDARD PRODUCT, SPECIFICATIONS AND CASE SIZES D ϕ x L (mm)

Part Number	Cap. (μ F)	W.V. (Vdc)	Dissipation Factor +20°C/120Hz	Ripple Current Rating (mA)rms +105°C/100KHz	Max. Z (Ω) 100KHz		Load Life Hours @+105°C	
					+20°C	-10°C		
NRE-JL101M6.3V5X11F	100	6.3	0.22	150	0.90	3.6	4,000	
NRE-JL221M6.3V5X11F	220		0.22	250	0.40	1.2	4,000	
NRE-JL331M6.3V6.3X11F	330		0.22	340	0.22	0.87	6,000	
NRE-JL471M6.3V6.3X11F	470		0.22	400	0.22	0.87	6,000	
NRE-JL102M6.3V8X11.5F	1000		0.22	640	0.13	0.52	6,000	
NRE-JL222M6.3V10X16F	2200		0.24	1300	0.062	0.25	8,000	
NRE-JL332M6.3V10X20F	3300		0.26	1400	0.046	0.18	8,000	
NRE-JL472M6.3V12.5X25F	4700		0.28	2230	0.032	0.11	8,000	
NRE-JL682M6.3V12.5X25F	6800		0.32	2230	0.032	0.11	8,000	
NRE-JL103M6.3V16X25F	10000		0.40	2930	0.021	0.060	8,000	
NRE-JL153M6.3V16X35.5F	15000		0.50	3610	0.015	0.044	8,000	
NRE-JL101M10V5X11F	100	10	0.19	150	0.9	3.6	4,000	
NRE-JL221M10V5X11F	220		0.19	250	0.4	1.2	4,000	
NRE-JL331M10V6.3X11F	330		0.19	400	0.22	0.87	6,000	
NRE-JL471M10V6.3X11F	470		0.19	400	0.22	0.87	6,000	
NRE-JL102M10V10X12.5F	1000		0.19	865	0.080	0.32	8,000	
NRE-JL222M10V10X20F	2200		0.21	1400	0.046	0.18	8,000	
NRE-JL332M10V12.5X20F	3300		0.23	1900	0.041	0.14	8,000	
NRE-JL472M10V12.5X25F	4700		0.25	2230	0.032	0.11	8,000	
NRE-JL682M10V16X25F	6800		0.29	2930	0.021	0.060	8,000	
NRE-JL103M10V16X31.5F	10000		0.37	3450	0.019	0.056	8,000	
NRE-JL470M16V5X11F	47		16	0.16	250	0.40	1.2	5,000
NRE-JL101M16V5X11F	100	0.16		250	0.40	1.2	5,000	
NRE-JL221M16V6.3X11F	220	0.16		400	0.22	0.87	7,000	
NRE-JL331M16V6.3X11F	330	0.16		400	0.22	0.87	7,000	
NRE-JL471M16V8X11.5F	470	0.16		640	0.13	0.52	7,000	
NRE-JL102M16V10X16F	1000	0.16		1210	0.062	0.25	10,000	
NRE-JL222M16V12.5X20F	2200	0.18		1900	0.041	0.14	10,000	
NRE-JL332M16V12.5X25F	3300	0.20		2230	0.032	0.11	10,000	
NRE-JL472M16V16X25F	4700	0.22		2930	0.021	0.060	10,000	
NRE-JL682M16V16X31.5F	6800	0.26		3450	0.019	0.056	10,000	
NRE-JL330M25V5X11F	33	25		0.14	250	0.40	1.2	5,000
NRE-JL470M25V5X11F	47		0.14	250	0.40	1.2	5,000	
NRE-JL101M25V5X11F	100		0.14	250	0.40	1.2	5,000	
NRE-JL221M25V6.3X11F	220		0.14	400	0.22	0.87	7,000	
NRE-JL331M25V8X11.5F	330		0.14	640	0.13	0.52	7,000	
NRE-JL471M25V10X12.5F	470		0.14	865	0.080	0.32	10,000	
NRE-JL102M25V10X20F	1000		0.14	1400	0.046	0.18	10,000	
NRE-JL222M25V12.5X25F	2200		0.16	2230	0.032	0.11	10,000	
NRE-JL332M25V16X25F	3300		0.18	2930	0.021	0.060	10,000	
NRE-JL472M25V16X31.5F	4700		0.20	3450	0.019	0.056	10,000	
NRE-JL330M35V5X11F	33		35	0.12	250	0.40	1.2	5,000
NRE-JL470M35V5X11F	47	0.12		250	0.40	1.2	5,000	
NRE-JL101M35V6.3X11F	100	0.12		400	0.22	0.87	7,000	
NRE-JL221M35V8X11.5F	220	0.12		640	0.13	0.52	7,000	
NRE-JL331M35V10X12.5F	330	0.12		865	0.080	0.32	10,000	
NRE-JL471M35V10X16F	470	0.12		1210	0.062	0.25	10,000	
NRE-JL102M35V12.5X20F	1000	0.12		1900	0.041	0.14	10,000	
NRE-JL222M35V16X25F	2200	0.14		2930	0.021	0.060	10,000	
NRE-JL332M35V16X31.5F	3300	0.16		3450	0.019	0.056	10,000	
NRE-JL1R0M50V5X11F	1.0	50		0.10	30	4.0	8.0	5,000
NRE-JL2R2M50V5X11F	2.2			0.10	43	2.5	6.0	5,000
NRE-JL3R3M50V5X11F	3.3		0.10	53	2.2	5.6	5,000	
NRE-JL4R7M50V5X11F	4.7		0.10	88	1.9	5.0	5,000	
NRE-JL100M50V5X11F	10		0.10	100	1.5	4.0	5,000	
NRE-JL220M50V5X11F	22		0.10	180	0.70	2.8	5,000	
NRE-JL330M50V5X11F	33		0.10	250	0.70	2.8	5,000	
NRE-JL470M50V6.3X11F	47		0.10	295	0.30	1.2	7,000	
NRE-JL101M50V8X11.5F	100		0.10	555	0.17	0.68	7,000	

Performance Passives By Design

NRE-JL Series

Radial Leaded Aluminum Electrolytic Capacitors



STANDARD PRODUCT, SPECIFICATIONS AND CASE SIZES D ϕ x L (mm)

Part Number	Cap. (μ F)	W.V. (Vdc)	Dissipation Factor +20°C/120Hz	Ripple Current Rating (mA)rms +105°C/100KHz	Max. Z (Ω) 100KHz		Load Life Hours @+105°C
					+20°C	-10°C	
NRE-JL221M50V10X16F	220	50	0.10	1050	0.084	0.34	10,000
NRE-JL331M50V10X20F	330		0.10	1220	0.06	0.24	10,000
NRE-JL471M50V12.5X20F	470		0.10	1660	0.045	0.15	10,000
NRE-JL102M50V16X25F	1000		0.10	2730	0.032	0.096	10,000
NRE-JL222M50V16X35.5F	2200		0.12	3150	0.019	0.057	10,000
NRE-JL100M63V5X11F	10	63	0.09	173	0.88	3.5	5,000
NRE-JL220M63V5X11F	22		0.09	173	0.88	3.5	5,000
NRE-JL330M63V6.3X11F	33		0.09	278	0.35	1.4	7,000
NRE-JL470M63V6.3X11F	47		0.09	278	0.35	1.4	7,000
NRE-JL101M63V10X12.5F	100		0.09	725	0.15	0.60	10,000
NRE-JL221M63V10X20F	220		0.09	1200	0.078	0.31	10,000
NRE-JL331M63V12.5X20F	330		0.09	1570	0.060	0.19	10,000
NRE-JL471M63V12.5X25F	470		0.09	1990	0.043	0.14	10,000
NRE-JL102M63V16X25F	1000		0.09	2730	0.032	0.096	10,000
NRE-JL1R0M100V5X11F	1.0		100	0.08	20	4.5	15.0
NRE-JL2R2M100V5X11F	2.2	0.08		30	3.0	13.0	5,000
NRE-JL3R3M100V5X11F	3.3	0.08		40	2.7	11.0	5,000
NRE-JL4R7M100V5X11F	4.7	0.08		65	2.5	10.0	5,000
NRE-JL100M100V6.3X11F	10	0.08		267	0.57	2.3	7,000
NRE-JL220M100V6.3X11F	22	0.08		267	0.57	2.3	7,000
NRE-JL330M100V8X11.5F	33	0.08		462	0.36	1.4	7,000
NRE-JL470M100V8X16F	47	0.08		585	0.25	1.0	7,000
NRE-JL101M100V10X20F	100	0.08		1040	0.12	0.52	10,000
NRE-JL221M100V12.5X25F	220	0.08		1620	0.060	0.23	10,000
NRE-JL331M100V16X25F	330	0.08		2210	0.044	0.16	10,000

RIPPLE CURRENT FREQUENCY CORRECTION FACTOR

Frequency (Hz) 6.3V ~ 50V	120	1K	10K	\leq 100K
1.0 ~ 10	0.42	0.60	0.80	1.00
22 ~ 33	0.55	0.75	0.90	1.00
47 ~ 330	0.70	0.85	0.95	1.00
470 ~ 1,000	0.75	0.90	0.98	1.00
2,200 ~ 1,5000	0.80	0.95	1.00	1.00


Frequency (Hz) 63V ~ 100V	120	1K	10K	\leq 100K
All Cap Values	0.42	0.60	0.80	1.00

DIAMETER AND LEADSPACE (mm)

Case Dia. (D ϕ)	5	6.3	8	10	12.5	16	18
Lead Dia. (d ϕ)	0.5	0.5	0.6	0.6	0.6	0.8	0.8
Lead Spacing (F)	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Dim. α	0.5	0.5	0.5	0.5	0.5	0.5	0.5

$\beta = L \leq 16\text{mm} = 1.5\text{mm}, L \geq 20\text{mm} = 2.0\text{mm}$

DIMENSIONS (mm)

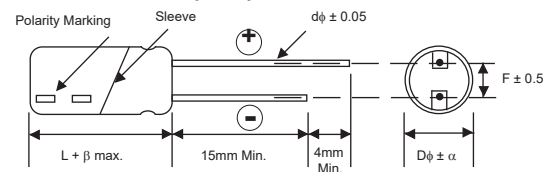

Drawing is representative of parts as supplied in bulk or straight lead format, please see taping specification for details on taped format packaging.